

Merriott

Multicolumn Plus





What does Merriott stand for?

Our bespoke heating and cooling solutions are the better choice for commercial applications across the UK and Ireland.

Merriott offers a diverse and versatile range of designer heating solutions. Whether they are building consultants, architects or designers, our customers can tailor our bespoke range of products to satisfy their specification requirements.

We have invested in world-class production facilities and manufacture products of the very highest standard - backed by revolutionary technology, rigorous testing and stringent quality control.

As a company, we have an unwavering commitment to innovation and sustainability, pioneering products that lead the way in design, performance and energy efficiency.

Underpinning all of this is our relationship with our customers: ensuring they can rely on best-in-class service and support, from specification right through to delivery.



Contents

Multicolumn Plus:

Introduction	06
Range Overview	08
Range Options	09
Heat Outputs	10
Weight & Water Contents	20
Interconnecting Information	21
Fixing Details	23
Mounting Details	25
Accessories	28
Connection Options	30
Correction Factors	31

Multicolumn Plus Bar:

Introduction	32
Technical Data	33

Multicolumn Plus Bench:

Introduction	34
Technical Data	35

Multicolumn Plus

Multicolumn Plus radiators integrate state-of-the-art technology with remarkable design, providing their users with the highest qualities of climate comfort and functionality.

The world-unique laser welding method enables achievement of the perfect quality of execution combined with outstanding visual appearance. The characteristic feature is the external shape of the columns, of the profile resembling the letter "D", designed especially to maximize the heating surface area in comparison with analogical columns of the round shape.

We offer 21 radiator heights as standard, ranging between 300mm and 3000mm. The Multicolumn Plus can be manufactured from 2 columns deep up to 6 columns deep, in a wide palette of RAL colours and alternative fixing solutions. This enables the Multicolumn Plus to be integrated into the design of any room space, achieving heat requirements and users' preferences.





The composition and shaping of Multicolumn Plus radiators were especially intended to facilitate maintaining them spotlessly clean, which is a vital feature when considering health care facilities application. Multicolumn Plus radiators are suited to rooms with heightened sanitary requirements and this is supported with a dedicated certificate, issued by the University of Kiel, Germany.

Remarkable precision of laser welding

Exceptional advantages of Multicolumn Plus radiators originate in the production process – a world-unique laser welding technique.

The researchers at the University of Stuttgart, in collaboration with their colleagues at the Fraunhofer Institute in Germany, have developed this truly futuristic technology. This innovation allows a precise processing of details, as well as total elimination of welding residue inside radiators.



In contrast to traditionally welded radiators, laser welding leaves a significantly more subtle joint on the radiator's surface, together with the mentioned lack of welding residue, it also reduces the risk of corrosion, as well as considerably prolonging the radiators life-span.

At Merriott, we pride ourselves on the high quality and durability of the Multicolumn Plus radiators that we offer a 10-year warranty on these radiators.


Still, there is one more thing which makes Multicolumn Plus so unique: our assembly line in our German production plant has been awarded a special federal Innovation Award of Thüringen.

REVIEW OF FEATURES:

- > Total laser welding ensures perfect appearance of the ready radiator, as well as outstanding quality, prolonged life-span (no welding joints disturbing the heating agent's flow, no welding residue inflicting corrosion)
- > Characteristic "D"-profiled columns, increasing heat output
- > Slender stub of the diameter of 1", connecting individual sections, common for all types
- > Connecting stub covers, welded as standard, for highly aesthetic look and long-lasting safety
- > 25mm distancing between sections – with the length of each section equal to 50mm – facilitates cleaning and provides outstanding hygienic qualities
- > Wide choice of the radiator height, offered as standard



The comparison of joints welded traditionally (butt welding, enlarged on the left) with the perfect Multicolumn Plus radiator joint welded with state of the art laser technology (enlarged on the right).

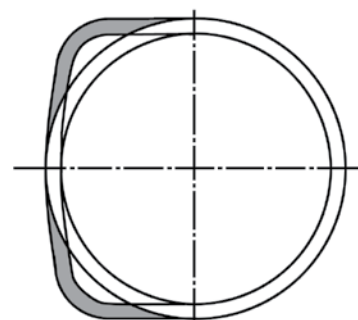

"D"-profiled Multicolumn Plus radiator's columns, as compared with the traditional round column. The cross section shows the significantly larger column's diameter. Increased total surface area (marked gray) provides higher heat output of Multicolumn Plus radiators.

Range Overview

Multicolumn Plus

The Merriott Multicolumn Plus is an elegant section radiator that combines modern architecture with traditional heating technology.

Laser welding practically eliminates all weld joints and provides a guaranteed flat surface. On the interior of the radiator, the laser welding prevents the excess welding material from accumulating and reduces the risk for friction and corrosion. The result is a quieter, more effective radiator that lasts longer. The D-shaped profiles are not only appealing, they also improve performance by up to 10% compared to the conventional design.

OUTPUTS:

All Merriott Multicolumn Plus radiators have been manufactured and tested in accordance with EN442.

FINISH:

Every Multicolumn Plus radiator undergoes a multi-stage pre-treatment process followed by an epoxy polyester primer coating. A stoved epoxy polyester powder coat in white (RAL 9016) is applied to all front and rear surfaces allowing the radiator to be fitted without further painting. The process is monitored to ensure continuous achievement of optimum adhesion, opacity and gloss levels.

COLOUR:

An extensive range of other RAL colours are available on request.

PACKAGING:

The entire surface of the radiator, including all 4 corners, is protected by cardboard and packed in shrink wrapped polythene.

CONNECTIONS:

Standard connections are 4 x 1/2" BSP connections. All Multicolumn Plus radiators are manufactured with an internal baffle to help with water flow. The tapping with the baffle is identified with a red plastic cap, all others being blue. It is important that the water inlet is connected to the tapping identified in red.

Some radiators have reversible connections, please see connection options on page 30.

Note: Flow and return positions must be specified at the time of ordering.

TESTING:

Multicolumn Plus radiators are tested at 13 Bar giving a maximum operating pressure of 10 Bar. Maximum operating temperature is 110°C.

DIMENSIONAL TOLERANCES:

Dimensional tolerances are in accordance with EN442.

MATERIALS:

Multicolumn Plus radiators are manufactured from 1.25mm thick steel tubes, with a standard diameter of 25mm (1").

MOUNTING:

Mounting options available on page 27. Welded Feet on page 9.

THE MULTICOLUMN PLUS:

- Laser welded, which enables sections to be produced completely free from shape defects and internal residues
- Available from two to six columns in a horizontal and vertical configuration, offering a great range of outputs from 101 watts to 12635 watts per section at $\Delta T50^{\circ}\text{C}$
- Available in 21 different heights, from 300 to 3000 mm and standard lengths from 200 to 3000mm


WARRANTY:

Merriott radiators are guaranteed for a period of 10 years from date of purchase in respect of defective materials and workmanship. The system should be designed in accordance with British Standard Code of Practice for Water Based Heating Systems in Buildings **BS EN 12828:2012+A1:2014** and **BS EN 12831: 2003**. The installation and commissioning of the system should comply with **BS EN 14336:2004**. On completion of the installation, the system should be properly flushed and filled in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems **BS 7593:2006**, Part L of Building Regulations and Good Practice Guidance for Scotland. Merriott strongly recommends the use of corrosion inhibitor for all applications. Failure to observe these standards may invalidate the manufacturer's warranty.

Joined radiators will be delivered with the required joining tool and components to assemble the radiator. Please contact Merriott Sales office for further information.

Range Options

Column Options

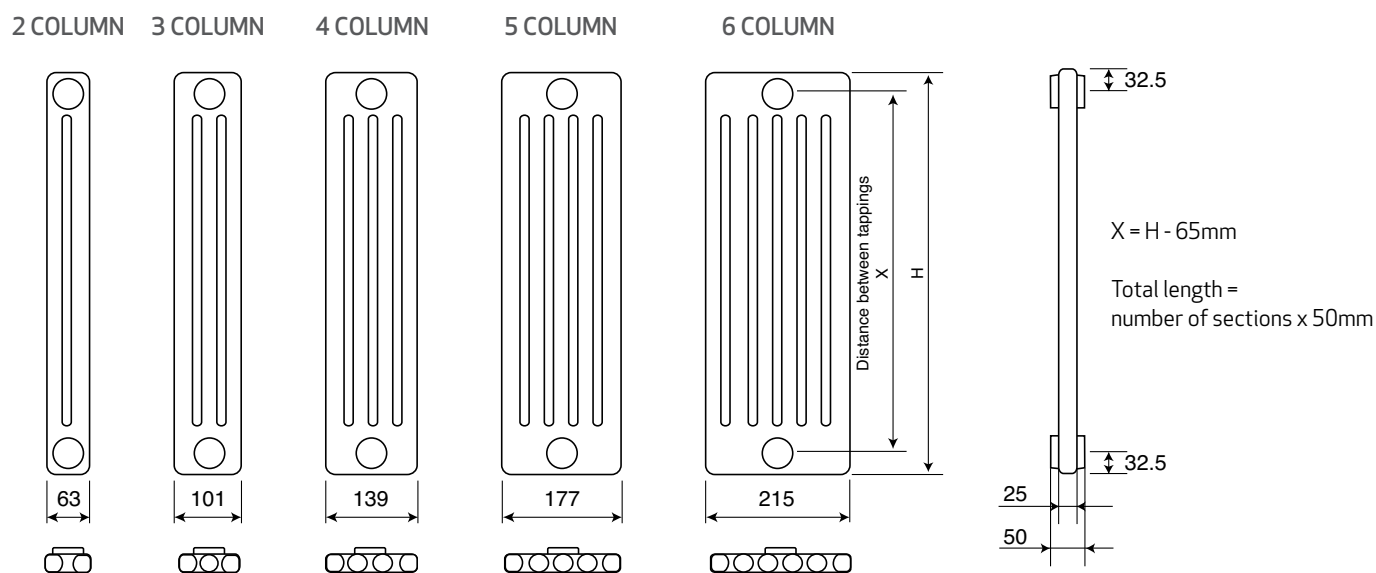


Curved Multicolumns

On request, certain models and dimensions of Multicolumn Plus radiators are available angled or curved. The picture shows standard angled connections, angle 45°, inside angle 90° and outside angle 90°. For curved radiators, the minimum radius of the curve is 1200mm up to a maximum of 4000mm.

For curved Multicolumn enquiries, please contact the Merriott Sales Office. A drawing will be requested along with the enquiry, this will then be checked and an official drawing produced for approval.




EXAMPLE:

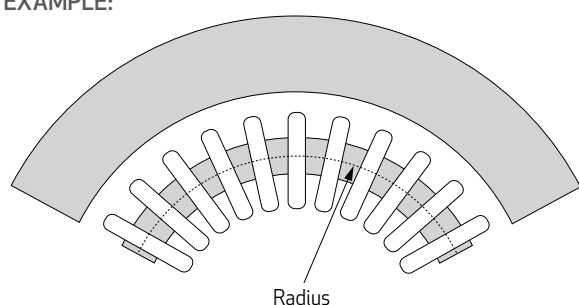

Angle 45°

Inside Angle 90°

Outside Angle 90°




Max X in mm

Dimension X	2 Col	3 Col	4 Col	5 Col	6 Col
Angle 45°	110	120	133	148	163
Inside Angle 90°	135	154	190	227	266
Outside Angle 90°	152	184	222	262	302

Multicolumn Plus Welded Feet

- > Standard height of 100mm
- > Additional wall brackets are included as standard on Multicolumn Plus with Welded Feet:
 - > Radiator Heights ≤600mm Recommended
 - > Radiator Heights >600mm Required



Heat Outputs

2 Column Radiators

Exponent 'n'		1.22		1.23		1.23		1.23		1.24		1.24		1.24		1.24		1.25		1.25		1.26	
Height (mm)		300		350		400		450		500		550		600		650		750		800		900	
Sections	Length (mm)	Output (Watts)																					
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	101	54	116	62	131	69	145	77	160	84	174	92	188	99	202	108	231	121	245	131	273	142
5	250	126	67	145	77	163	87	181	96	199	105	217	115	235	124	253	135	288	151	306	164	341	178
6	300	151	80	174	92	196	104	218	115	239	126	261	137	282	149	303	162	346	181	367	196	409	214
7	350	177	94	203	108	228	121	254	134	279	147	304	160	329	174	354	189	404	211	428	229	478	249
8	400	202	107	232	123	261	138	290	154	319	168	348	183	376	198	405	216	461	242	489	262	546	285
9	450	227	121	261	139	294	156	326	173	359	189	391	206	423	223	455	243	519	272	551	294	614	320
10	500	252	134	290	154	326	173	363	192	399	210	435	229	470	248	506	270	577	302	612	327	682	356
11	550	278	147	319	169	359	190	399	211	439	231	478	252	517	273	556	297	634	332	673	360	750	392
12	600	303	161	348	185	392	208	435	230	479	252	522	275	564	298	607	325	692	362	734	393	819	427
13	650	328	174	376	200	424	225	471	250	518	273	565	298	611	322	657	352	750	393	795	425	887	463
14	700	353	188	405	216	457	242	508	269	558	294	608	321	658	347	708	379	807	423	856	458	955	498
15	750	379	201	434	231	490	260	544	288	598	315	652	344	705	372	759	406	865	453	918	491	1023	534
16	800	404	214	463	246	522	277	580	307	638	336	695	366	752	397	809	433	923	483	979	523	1092	570
17	850	429	228	492	262	555	294	616	326	678	357	739	389	799	422	860	460	980	513	1040	556	1160	605
18	900	454	241	521	277	588	311	653	346	718	378	782	412	846	446	910	487	1038	544	1101	589	1228	641
19	950	480	255	550	293	620	329	689	365	758	399	826	435	893	471	961	514	1096	574	1162	622	1296	676
20	1000	505	268	579	308	653	346	725	384	798	420	869	458	940	496	1011	541	1153	604	1223	654	1364	712
21	1050	530	281	608	323	685	363	761	403	837	441	913	481	987	521	1062	568	1211	634	1285	687	1433	748
22	1100	555	295	637	339	718	381	798	422	877	462	956	504	1034	546	1113	595	1269	664	1346	720	1501	783
23	1150	581	308	666	354	751	398	834	442	917	483	1000	527	1081	570	1163	622	1326	695	1407	752	1569	819
24	1200	606	322	695	370	783	415	870	461	957	504	1043	550	1128	595	1214	649	1384	725	1468	785	1637	854
25	1250	631	335	724	385	816	433	907	480	997	525	1087	573	1176	620	1264	676	1442	755	1529	818	1706	890
26	1300	656	348	753	400	849	450	943	499	1037	546	1130	595	1223	645	1315	703	1499	785	1590	851	1774	926
27	1350	681	362	782	416	881	467	979	518	1077	567	1173	618	1270	670	1365	730	1557	815	1652	883	1842	961
28	1400	707	375	811	431	914	484	1015	538	1117	588	1217	641	1317	694	1416	757	1614	846	1713	916	1910	997
29	1450	732	389	840	447	947	502	1052	557	1157	609	1260	664	1364	719	1467	784	1672	876	1774	949	1978	1032
30	1500	757	402	869	462	979	519	1088	576	1196	630	1304	687	1411	744	1517	811	1730	906	1835	981	2047	1068
31	1550	782	415	898	477	1012	536	1124	595	1236	651	1347	710	1458	769	1568	838	1787	936	1896	1014	2115	1104
32	1600	808	429	927	493	1044	554	1160	614	1276	672	1391	733	1505	794	1618	865	1845	966	1957	1047	2183	1139
33	1650	833	442	956	508	1077	571	1197	634	1316	693	1434	756	1552	818	1669	892	1903	997	2019	1080	2251	1175
34	1700	858	456	985	524	1110	588	1233	653	1356	714	1478	779	1599	843	1719	920	1960	1027	2080	1112	2319	1210
35	1750	883	469	1014	539	1142	606	1269	672	1396	735	1521	802	1646	868	1770	947	2018	1057	2141	1145	2388	1246
36	1800	909	482	1043	554	1175	623	1305	691	1436	756	1565	824	1693	893	1821	974	2076	1087	2202	1178	2456	1282
37	1850	934	496	1072	570	1208	640	1342	710	1476	777	1608	847	1740	918	1871	1001	2133	1117	2263	1210	2524	1317
38	1900	959	509	1100	585	1240	657	1378	730	1515	798	1651	870	1787	942	1922	1028	2191	1148	2324	1243	2592	1353
39	1950	984	523	1129	601	1273	675	1414	749	1555	819	1695	893	1834	967	1972	1055	2249	1178	2386	1276	2661	1388
40	2000	1010	536	1158	616	1306	692	1450	768	1595	840	1738	916	1881	992	2023	1082	2306	1208	2447	1309	2729	1424
41	2050	1035	549	1187	631	1338	709	1487	787	1635	861	1782	939	1928	1017	2073	1109	2364	1238	2508	1341	2797	1460
42	2100	1060	563	1216	647	1371	727	1523	806	1675	882	1825	962	1975	1042	2124	1136	2422	1268	2569	1374	2865	1495
43	2150	1085	576	1245	662	1404	744	1559	826	1715	903	1869	985	2022	1066	2175	1163	2479	1299	2630	1407	2933	1531
44	2200	1111	590	1274	678	1436	761	1595	845	1755	924	1912	1008	2069	1091	2225	1190	2537	1329	2691	1439	3002	1566
45	2250	1136	603	1303	693	1469	779	1632	864	1795	945	1956	1031	2116	1116	2276	1217	2595	1359	2753	1472	3070	1602
46	2300	1161	616	1332	708	1501	796	1668	883	1834	966	1999	1053	2163	1141	2326	1244	2652	1389	2814	1505	3138	1638
47	2350	1186	630	1361	724	1534	813	1704	902	1874	987	2043	1076	2210	1166	2377	1271	2710	1419	2875	1538	3206	1673
48	2400	1212	643	1390	739	1567	830	1740	922	1914	1008	2086	1099	2257	1190	2427	1298	2768	1450	2936	1570	3275	1709
49	2450	1237	657	1419	755	1599	848	1777	941	1954	1029	2130	1122	2304	1215	2478	1325	2825	1480	2997	1603	3343	1744
50	2500	1262	670	1448	770	1632	865	1813	960	1994	1050	2173	1145	2351	1240	2529	1352	2883	1510	3059	1636	3411	1780



Exponent 'n'		1.27		1.28		1.28		1.30		1.32		1.33		1.34		1.34		1.34		1.33
Height (mm)		1000		1100		1200		1500		1800		2000		2200		2500		2800		3000
Sections	Length (mm)	Output (Watts)																		
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50
4	200	301	156	329	170	357	184	443	226	529	267	587	295	647	323	737	369	829	415	892
5	250	376	196	412	213	447	231	553	283	661	334	734	369	808	404	921	461	1037	519	1116
6	300	452	235	494	255	536	277	664	339	793	401	881	443	970	485	1105	553	1244	623	1339
7	350	527	274	576	298	626	323	774	396	926	468	1028	517	1131	566	1290	645	1452	727	1562
8	400	602	313	658	340	715	369	885	452	1058	534	1175	590	1293	646	1474	738	1659	830	1785
9	450	677	352	741	383	804	415	996	509	1190	601	1322	664	1455	727	1658	830	1866	934	2008
10	500	753	391	823	425	894	461	1106	565	1322	668	1468	738	1616	808	1842	922	2074	1038	2231
11	550	828	430	905	468	983	507	1217	622	1455	735	1615	812	1778	889	2027	1014	2281	1142	2454
12	600	903	469	988	510	1072	553	1328	678	1587	802	1762	886	1940	970	2211	1106	2488	1246	2677
13	650	978	508	1070	553	1162	599	1438	735	1719	868	1909	959	2101	1050	2395	1199	2696	1349	2900
14	700	1054	547	1152	595	1251	645	1549	791	1851	935	2056	1033	2263	1131	2579	1291	2903	1453	3123
15	750	1129	587	1235	638	1340	692	1660	848	1984	1002	2203	1107	2424	1212	2763	1383	3110	1557	3347
16	800	1204	626	1317	680	1430	738	1770	904	2116	1069	2349	1181	2586	1293	2948	1475	3318	1661	3570
17	850	1279	665	1399	723	1519	784	1881	961	2248	1136	2496	1255	2748	1374	3132	1567	3525	1765	3793
18	900	1355	704	1481	765	1608	830	1992	1017	2380	1202	2643	1328	2909	1454	3316	1660	3733	1868	4016
19	950	1430	743	1564	808	1698	876	2102	1074	2513	1269	2790	1402	3071	1535	3500	1752	3940	1972	4239
20	1000	1505	782	1646	850	1787	922	2213	1130	2645	1336	2937	1476	3233	1616	3685	1844	4147	2076	4462
21	1050	1580	821	1728	893	1877	968	2323	1187	2777	1403	3084	1550	3394	1697	3869	1936	4355	2180	4685
22	1100	1656	860	1811	935	1966	1014	2434	1243	2909	1470	3230	1624	3556	1778	4053	2028	4562	2284	4908
23	1150	1731	899	1893	978	2055	1060	2545	1300	3042	1536	3377	1697	3717	1858	4237	2121	4769	2387	5131
24	1200	1806	938	1975	1020	2145	1106	2655	1356	3174	1603	3524	1771	3879	1939	4422	2213	4977	2491	5354
25	1250	1882	978	2058	1063	2234	1153	2766	1413	3306	1670	3671	1845	4041	2020	4606	2305	5184	2595	5578
26	1300	1957	1017	2140	1105	2323	1199	2877	1469	3438	1737	3818	1919	4202	2101	4790	2397	5392	2699	5801
27	1350	2032	1056	2222	1148	2413	1245	2987	1526	3570	1804	3965	1993	4364	2182	4974	2489	5599	2803	6024
28	1400	2107	1095	2304	1190	2502	1291	3098	1582	3703	1870	4112	2066	4526	2262	5158	2582	5806	2906	6247
29	1450	2183	1134	2387	1233	2591	1337	3209	1639	3835	1937	4258	2140	4687	2343	5343	2674	6014	3010	6470
30	1500	2258	1173	2469	1275	2681	1383	3319	1695	3967	2004	4405	2214	4849	2424	5527	2766	6221	3114	6693
31	1550	2333	1212	2551	1318	2770	1429	3430	1752	4099	2071	4552	2288	-	-	-	-	-	-	-
32	1600	2408	1251	2634	1360	2860	1475	3540	1808	4232	2138	4699	2362	-	-	-	-	-	-	-
33	1650	2484	1290	2716	1403	2949	1521	3651	1865	4364	2204	4846	2435	-	-	-	-	-	-	-
34	1700	2559	1329	2798	1445	3038	1567	3762	1921	4496	2271	4993	2509	-	-	-	-	-	-	-
35	1750	2634	1369	2881	1488	3128	1614	3872	1978	4628	2338	5139	2583	-	-	-	-	-	-	-
36	1800	2709	1408	2963	1530	3217	1660	3983	2034	4761	2405	5286	2657	-	-	-	-	-	-	-
37	1850	2785	1447	3045	1573	3306	1706	4094	2091	4893	2472	5433	2731	-	-	-	-	-	-	-
38	1900	2860	1486	3127	1615	3396	1752	4204	2147	5025	2538	5580	2804	-	-	-	-	-	-	-
39	1950	2935	1525	3210	1658	3485	1798	4315	2204	5157	2605	5727	2878	-	-	-	-	-	-	-
40	2000	3010	1564	3292	1700	3574	1844	4426	2260	5290	2672	5874	2952	-	-	-	-	-	-	-
41	2050	3086	1603	3374	1743	3664	1890	4536	2317	5422	2739	6020	3026	-	-	-	-	-	-	-
42	2100	3161	1642	3457	1785	3753	1936	4647	2373	5554	2806	6167	3100	-	-	-	-	-	-	-
43	2150	3236	1681	3539	1828	3842	1982	4758	2430	5686	2872	6314	3173	-	-	-	-	-	-	-
44	2200	3311	1720	3621	1870	3932	2028	4868	2486	5819	2939	6461	3247	-	-	-	-	-	-	-
45	2250	3387	1760	3704	1913	4021	2075	4979	2543	5951	3006	6608	3321	-	-	-	-	-	-	-
46	2300	3462	1799	3786	1955	4111	2121	5089	2599	6083	3073	6755	3395	-	-	-	-	-	-	-
47	2350	3537	1838	3868	1998	4200	2167	5200	2656	6215	3140	6901	3469	-	-	-	-	-	-	-
48	2400	3612	1877	3950	2040	4289	2213	5311	2712	6348	3206	7048	3542	-	-	-	-	-	-	-
49	2450	3688	1916	4033	2083	4379	2259	5421	2769	6480	3273	7195	3616	-	-	-	-	-	-	-
50	2500	3763	1955	4115	2125	4468	2305	5532	2825	6612	3340	7342	3690	-	-	-	-	-	-	-

NOTE:

All outputs are in accordance with BS EN442 certification.

'n' = average exponent value.

Due to manufacturing tolerances of sectional Multicolumn Plus radiators, dimensions shown are subject to slight variance.

Height: Up to 1mm, Length: 0% up to +1%.

 Indicates weight of over 100kg

Heat Outputs

3 Column Radiators

Exponent 'n'		1.23		1.23		1.24		1.24		1.25		1.26		1.26		1.27		1.28		1.28		1.29	
Height (mm)		300		350		400		450		500		550		600		650		750		800		900	
Sections	Length (mm)	Output (Watts)																					
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	142	75	162	86	182	96	202	106	222	116	241	126	260	136	279	149	318	164	336	180	374	192
5	250	177	94	203	107	228	120	252	133	277	145	301	157	325	170	349	187	397	205	421	225	468	241
6	300	212	112	243	128	273	144	303	160	332	174	362	188	390	203	419	224	476	246	505	270	561	289
7	350	248	131	284	150	319	168	353	186	388	203	422	220	456	237	489	262	556	287	589	315	655	337
8	400	283	150	324	171	364	192	404	213	443	232	482	251	521	271	559	299	635	328	673	360	749	385
9	450	319	168	365	193	410	216	454	239	498	261	542	283	586	305	629	336	715	369	757	405	842	433
10	500	354	187	405	214	455	240	505	266	554	290	603	314	651	339	699	374	794	410	841	450	936	481
11	550	389	206	446	235	501	264	555	293	609	319	663	345	716	373	769	411	873	451	925	495	1029	529
12	600	425	224	486	257	546	288	606	319	665	348	723	377	781	407	838	448	953	492	1009	540	1123	577
13	650	460	243	527	278	592	312	656	346	720	377	783	408	846	441	908	486	1032	533	1094	585	1217	625
14	700	496	262	567	300	637	336	707	372	775	406	844	440	911	475	978	523	1112	574	1178	630	1310	673
15	750	531	281	608	321	683	360	757	399	831	435	904	471	976	509	1048	560	1191	615	1262	675	1404	722
16	800	566	299	648	342	728	384	808	426	886	464	964	502	1041	542	1118	598	1270	656	1346	720	1497	770
17	850	602	318	689	364	774	408	858	452	941	493	1024	534	1106	576	1188	635	1350	697	1430	765	1591	818
18	900	637	337	729	385	819	432	909	479	997	522	1085	565	1171	610	1258	673	1429	738	1514	810	1684	866
19	950	673	355	770	407	865	456	959	505	1052	551	1145	597	1237	644	1328	710	1509	779	1598	855	1778	914
20	1000	708	374	810	428	910	480	1010	532	1108	580	1205	628	1302	678	1397	747	1588	820	1682	900	1872	962
21	1050	743	393	851	449	956	504	1060	559	1163	609	1265	659	1367	712	1467	785	1667	861	1767	945	1965	1010
22	1100	779	411	891	471	1001	528	1111	585	1218	638	1326	691	1432	746	1537	822	1747	902	1851	990	2059	1058
23	1150	814	430	932	492	1047	552	1161	612	1274	667	1386	722	1497	780	1607	859	1826	943	1935	1035	2152	1106
24	1200	850	449	972	514	1092	576	1212	638	1329	696	1446	754	1562	814	1677	897	1906	984	2019	1080	2246	1154
25	1250	885	468	1013	535	1138	600	1262	665	1385	725	1507	785	1627	848	1747	934	1985	1025	2103	1125	2340	1203
26	1300	920	486	1053	556	1184	624	1312	692	1440	754	1567	816	1692	881	1817	972	2064	1066	2187	1170	2433	1251
27	1350	956	505	1094	578	1229	648	1363	718	1495	783	1627	848	1757	915	1886	1009	2144	1107	2271	1215	2527	1299
28	1400	991	524	1134	599	1275	672	1413	745	1551	812	1687	879	1822	949	1956	1046	2223	1148	2355	1260	2620	1347
29	1450	1027	542	1175	621	1320	696	1464	771	1606	841	1748	911	1887	983	2026	1084	2303	1189	2439	1305	2714	1395
30	1500	1062	561	1215	642	1366	720	1514	798	1661	870	1808	942	1952	1017	2096	1121	2382	1230	2524	1350	2807	1443
31	1550	1097	580	1256	663	1411	744	1565	825	1717	899	1868	973	2017	1051	2166	1158	2461	1271	2608	1395	2901	1491
32	1600	1133	598	1296	685	1457	768	1615	851	1772	928	1928	1005	2083	1085	2236	1196	2541	1312	2692	1440	2995	1539
33	1650	1168	617	1337	706	1502	792	1666	878	1828	957	1989	1036	2148	1119	2306	1233	2620	1353	2776	1485	3088	1587
34	1700	1204	636	1377	728	1548	816	1716	904	1883	986	2049	1068	2213	1153	2376	1270	2700	1394	2860	1530	3182	1635
35	1750	1239	655	1418	749	1593	840	1767	931	1938	1015	2109	1099	2278	1187	2445	1308	2779	1435	2944	1575	3275	1684
36	1800	1274	673	1458	770	1639	864	1817	958	1994	1044	2169	1130	2343	1220	2515	1345	2858	1476	3028	1620	3369	1732
37	1850	1310	692	1499	792	1684	888	1868	984	2049	1073	2230	1162	2408	1254	2585	1383	2938	1517	3112	1665	3462	1780
38	1900	1345	711	1539	813	1730	912	1918	1011	2104	1102	2290	1193	2473	1288	2655	1420	3017	1558	3197	1710	3556	1828
39	1950	1381	729	1580	835	1775	936	1969	1037	2160	1131	2350	1225	2538	1322	2725	1457	3097	1599	3281	1755	3650	1876
40	2000	1416	748	1620	856	1821	960	2019	1064	2215	1160	2410	1256	2603	1356	2795	1495	3176	1640	3365	1799	3743	1924
41	2050	1451	767	1661	877	1866	984	2070	1091	2271	1189	2471	1287	2668	1390	2865	1532	3255	1681	3449	1844	3837	1972
42	2100	1487	785	1701	899	1912	1008	2120	1117	2326	1218	2531	1319	2733	1424	2935	1569	3335	1722	3533	1889	3930	2020
43	2150	1522	804	1742	920	1957	1032	2171	1144	2381	1247	2591	1350	2798	1458	3004	1607	3414	1763	3617	1934	4024	2068
44	2200	1558	823	1782	942	2003	1056	2221	1170	2437	1276	2651	1382	2864	1492	3074	1644	3494	1804	3701	1979	4118	2116
45	2250	1593	842	1823	963	2048	1080	2272	1197	2492	1305	2712	1413	2929	1526	3144	1681	3573	1845	3785	2024	4211	2165
46	2300	1628	860	1863	984	2094	1104	2322	1224	2547	1334	2772	1444	2994	1559	3214	1719	3652	1886	3870	2069	4305	2213
47	2350	1664	879	1904	1006	2139	1128	2373	1250	2603	1363	2832	1476	3059	1593	3284	1756	3732	1927	3954	2114	4398	2261
48	2400	1699	898	1944	1027	2185	1152	2423	1277	2658	1392	2892	1507	3124	1627	3354	1794	3811	1968	4038	2159	4492	2309
49	2450	1735	916	1985	1049	2230	1176	2474	1303	2714	1421	2953	1539	3189	1661	3424	1831	3891	2009	4122	2204	4585	2357
50	2500	1770	935	2025	1070	2276	1200	2524	1330	2769	1450	3013	1570	3254	1695	3494	1868	3970	2050	4206	2249	4679	2405



Exponent 'n'		1.30		1.30		1.31		1.33		1.34		1.34		1.34		1.34		1.33		1.32	
Height (mm)		1000		1100		1200		1500		1800		2000		2200		2500		2800		3000	
Sections	Length (mm)	Output (Watts)																			
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	412	210	449	230	487	247	599	301	712	356	788	394	865	433	982	491	1100	553	1181	597
5	250	515	263	562	287	609	309	749	377	890	446	986	493	1081	541	1227	614	1376	692	1476	746
6	300	618	316	674	344	730	371	899	452	1068	535	1183	592	1298	649	1473	737	1651	830	1771	895
7	350	721	368	786	402	852	433	1049	527	1247	624	1380	690	1514	757	1718	860	1926	968	2066	1044
8	400	824	421	899	459	974	494	1198	602	1425	713	1577	789	1730	866	1963	982	2201	1106	2361	1194
9	450	927	473	1011	517	1095	556	1348	678	1603	802	1774	887	1946	974	2209	1105	2476	1245	2656	1343
10	500	1030	526	1123	574	1217	618	1498	753	1781	891	1971	986	2163	1082	2454	1228	2751	1383	2952	1492
11	550	1133	579	1236	631	1339	680	1648	828	1959	980	2168	1085	2379	1190	2700	1351	3026	1521	3247	1641
12	600	1236	631	1348	689	1460	742	1798	904	2137	1069	2365	1183	2595	1298	2945	1474	3301	1660	3542	1790
13	650	1339	684	1460	746	1582	803	1947	979	2315	1158	2562	1282	2811	1407	3191	1596	3576	1798	3837	1940
14	700	1442	736	1573	804	1704	865	2097	1054	2493	1247	2759	1380	3028	1515	3436	1719	3851	1936	4132	2089
15	750	1545	789	1685	861	1826	927	2247	1130	2671	1337	2957	1479	3244	1623	3681	1842	4127	2075	4427	2238
16	800	1648	842	1797	918	1947	989	2397	1205	2849	1426	3154	1578	3460	1731	3927	1965	4402	2213	4723	2387
17	850	1751	894	1910	976	2069	1051	2547	1280	3027	1515	3351	1676	3677	1839	4172	2088	4677	2351	5018	2536
18	900	1854	947	2022	1033	2191	1112	2696	1355	3205	1604	3548	1775	3893	1948	4418	2210	4952	2489	5313	2686
19	950	1957	999	2134	1091	2312	1174	2846	1431	3384	1693	3745	1873	4109	2056	4663	2333	5227	2628	5608	2835
20	1000	2060	1052	2247	1148	2434	1236	2996	1506	3562	1782	3942	1972	4325	2164	4909	2456	5502	2766	5903	2984
21	1050	2163	1105	2359	1205	2556	1298	3146	1581	3740	1871	4139	2071	4542	2272	5154	2579	5777	2904	6198	3133
22	1100	2266	1157	2471	1263	2677	1360	3296	1657	3918	1960	4336	2169	4758	2380	5400	2702	6052	3043	6494	3282
23	1150	2369	1210	2584	1320	2799	1421	3445	1732	4096	2049	4533	2268	4974	2489	5645	2824	6327	3181	6789	3432
24	1200	2472	1262	2696	1378	2921	1483	3595	1807	4274	2138	4730	2366	5190	2597	5890	2947	6602	3319	7084	3581
25	1250	2575	1315	2809	1435	3043	1545	3745	1883	4452	2228	4928	2465	5407	2705	6136	3070	6878	3458	7379	3730
26	1300	2677	1368	2921	1492	3164	1607	3895	1958	4630	2317	5125	2564	5623	2813	6381	3193	7153	3596	7674	3879
27	1350	2780	1420	3033	1550	3286	1669	4045	2033	4808	2406	5322	2662	5839	2921	6627	3316	7428	3734	7969	4028
28	1400	2883	1473	3146	1607	3408	1730	4194	2108	4986	2495	5519	2761	6055	3030	6872	3438	7703	3872	8265	4178
29	1450	2986	1525	3258	1665	3529	1792	4344	2184	5164	2584	5716	2859	6272	3138	7118	3561	7978	4011	8560	4327
30	1500	3089	1578	3370	1722	3651	1854	4494	2259	5342	2673	5913	2958	6488	3246	7363	3684	8253	4149	8855	4476
31	1550	3192	1631	3483	1779	3773	1916	4644	2334	5520	2762	6110	3057	-	-	-	-	-	-	-	-
32	1600	3295	1683	3595	1837	3894	1978	4794	2410	5699	2851	6307	3155	-	-	-	-	-	-	-	-
33	1650	3398	1736	3707	1894	4016	2039	4943	2485	5877	2940	6504	3254	-	-	-	-	-	-	-	-
34	1700	3501	1788	3820	1952	4138	2101	5093	2560	6055	3029	6701	3352	-	-	-	-	-	-	-	-
35	1750	3604	1841	3932	2009	4260	2163	5243	2636	6233	3119	6899	3451	-	-	-	-	-	-	-	-
36	1800	3707	1894	4044	2066	4381	2225	5393	2711	6411	3208	7096	3550	-	-	-	-	-	-	-	-
37	1850	3810	1946	4157	2124	4503	2287	5543	2786	6589	3297	7293	3648	-	-	-	-	-	-	-	-
38	1900	3913	1999	4269	2181	4625	2348	5692	2861	6767	3386	7490	3747	-	-	-	-	-	-	-	-
39	1950	4016	2051	4381	2239	4746	2410	5842	2937	6945	3475	7687	3845	-	-	-	-	-	-	-	-
40	2000	4119	2104	4494	2296	4868	2472	5992	3012	7123	3564	7884	3944	-	-	-	-	-	-	-	-
41	2050	4222	2157	4606	2353	4990	2534	6142	3087	7301	3653	8081	4043	-	-	-	-	-	-	-	-
42	2100	4325	2209	4718	2411	5111	2596	6292	3163	7479	3742	8278	4141	-	-	-	-	-	-	-	-
43	2150	4428	2262	4831	2468	5233	2657	6441	3238	7657	3831	8475	4240	-	-	-	-	-	-	-	-
44	2200	4531	2314	4943	2526	5355	2719	6591	3313	7836	3920	8672	4338	-	-	-	-	-	-	-	-
45	2250	4634	2367	5055	2583	5477	2781	6741	3389	8014	4010	8870	4437	-	-	-	-	-	-	-	-
46	2300	4737	2420	5168	2640	5598	2843	6891	3464	8192	4099	9067	4536	-	-	-	-	-	-	-	-
47	2350	4840	2472	5280	2698	5720	2905	7041	3539	8370	4188	9264	4634	-	-	-	-	-	-	-	-
48	2400	4943	2525	5392	2755	5842	2966	7190	3614	8548	4277	9461	4733	-	-	-	-	-	-	-	-
49	2450	5046	2577	5505	2813	5963	3028	7340	3690	8726	4366	9658	4831	-	-	-	-	-	-	-	-
50	2500	5149	2630	5617	2870	6085	3090	7490	3765	8904	4455	9855	4930	-	-	-	-	-	-	-	-

NOTE:

All outputs are in accordance with BS EN442 certification.

'n' = average exponent value.

Due to manufacturing tolerances of sectional Multicolumn Plus radiators, dimensions shown are subject to slight variance.


Height: Up to 1mm, Length: 0% up to +1%.

 Indicates weight of over 100kg

Heat Outputs

4 Column Radiators

Exponent 'n'		1.23		1.24		1.25		1.26		1.26		1.27		1.28		1.29		1.30		1.30		1.31	
Height (mm)		300		350		400		450		500		550		600		650		750		800		900	
Sections	Length (mm)	Output (Watts)																					
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	182	96	208	105	234	122	259	135	284	148	308	160	332	172	357	191	405	207	428	229	476	242
5	250	228	121	260	131	292	153	323	169	354	185	385	200	416	215	446	238	506	259	535	286	595	302
6	300	273	145	312	157	350	184	388	202	425	222	462	239	499	257	535	286	607	310	642	344	714	362
7	350	319	169	364	183	409	214	453	236	496	259	539	279	582	300	624	334	708	362	749	401	832	423
8	400	364	193	416	209	467	245	517	270	567	296	616	319	665	343	713	381	809	414	857	458	951	483
9	450	410	217	468	235	526	275	582	303	638	333	693	359	748	386	802	429	910	465	964	515	1070	544
10	500	456	241	520	261	584	306	647	337	709	370	770	399	831	429	892	477	1012	517	1071	573	1189	604
11	550	501	265	572	288	642	337	711	371	780	407	847	439	914	472	981	525	1113	569	1178	630	1308	664
12	600	547	289	624	314	701	367	776	404	851	444	924	479	997	515	1070	572	1214	620	1285	687	1427	725
13	650	592	313	677	340	759	398	841	438	921	481	1002	519	1081	558	1159	620	1315	672	1392	744	1546	785
14	700	638	337	729	366	818	428	906	472	992	518	1079	559	1164	601	1248	668	1416	724	1499	802	1665	846
15	750	683	362	781	392	876	459	970	506	1063	555	1156	599	1247	644	1337	715	1517	776	1606	859	1784	906
16	800	729	386	833	418	934	490	1035	539	1134	592	1233	638	1330	686	1427	763	1619	827	1713	916	1903	966
17	850	775	410	885	444	993	520	1100	573	1205	629	1310	678	1413	729	1516	811	1720	879	1820	973	2022	1027
18	900	820	434	937	471	1051	551	1164	607	1276	666	1387	718	1496	772	1605	858	1821	931	1927	1031	2141	1087
19	950	866	458	989	497	1110	581	1229	640	1347	703	1464	758	1579	815	1694	906	1922	982	2034	1088	2259	1148
20	1000	911	482	1041	523	1168	612	1294	674	1418	740	1541	798	1662	858	1783	954	2023	1034	2141	1145	2378	1208
21	1050	957	506	1093	549	1226	643	1358	708	1488	777	1618	838	1746	901	1872	1001	2124	1086	2248	1202	2497	1268
22	1100	1002	530	1145	575	1285	673	1423	741	1559	814	1695	878	1829	944	1962	1049	2226	1137	2356	1260	2616	1329
23	1150	1048	554	1197	601	1343	704	1488	775	1630	851	1772	918	1912	987	2051	1097	2327	1189	2463	1317	2735	1389
24	1200	1093	578	1249	627	1402	734	1552	809	1701	888	1849	958	1995	1030	2140	1144	2428	1241	2570	1374	2854	1450
25	1250	1139	603	1301	654	1460	765	1617	843	1772	925	1926	998	2078	1073	2229	1192	2529	1293	2677	1432	2973	1510
26	1300	1185	627	1353	680	1518	796	1682	876	1843	962	2003	1037	2161	1115	2318	1240	2630	1344	2784	1489	3092	1570
27	1350	1230	651	1405	706	1577	826	1746	910	1914	999	2080	1077	2244	1158	2407	1287	2731	1396	2891	1546	3211	1631
28	1400	1276	675	1457	732	1635	857	1811	944	1985	1036	2157	1117	2327	1201	2496	1335	2832	1448	2998	1603	3330	1691
29	1450	1321	699	1509	758	1694	887	1876	977	2056	1073	2234	1157	2410	1244	2586	1383	2934	1499	3105	1661	3449	1752
30	1500	1367	723	1561	784	1752	918	1940	1011	2126	1110	2311	1197	2494	1287	2675	1430	3035	1551	3212	1718	3568	1812
31	1550	1412	747	1613	810	1810	949	2005	1045	2197	1147	2388	1237	2577	1330	2764	1478	3136	1603	3319	1775	3687	1872
32	1600	1458	771	1665	836	1869	979	2070	1078	2268	1184	2465	1277	2660	1373	2853	1526	3237	1654	3426	1832	3805	1933
33	1650	1503	795	1717	863	1927	1010	2134	1112	2339	1221	2542	1317	2743	1416	2942	1574	3338	1706	3533	1890	3924	1993
34	1700	1549	819	1769	889	1986	1040	2199	1146	2410	1258	2619	1357	2826	1459	3031	1621	3439	1758	3640	1947	4043	2054
35	1750	1595	844	1821	915	2044	1071	2264	1180	2481	1295	2696	1397	2909	1502	3121	1669	3541	1810	3747	2004	4162	2114
36	1800	1640	868	1873	941	2102	1102	2328	1213	2552	1332	2773	1436	2992	1544	3210	1717	3642	1861	3855	2061	4281	2174
37	1850	1686	892	1925	967	2161	1132	2393	1247	2623	1369	2850	1476	3075	1587	3299	1764	3743	1913	3962	2119	4400	2235
38	1900	1731	916	1978	993	2219	1163	2458	1281	2693	1406	2928	1516	3159	1630	3388	1812	3844	1965	4069	2176	4519	2295
39	1950	1777	940	2030	1019	2278	1193	2523	1314	2764	1443	3005	1556	3242	1673	3477	1860	3945	2016	4176	2233	4638	2356
40	2000	1822	964	2082	1046	2336	1224	2587	1348	2835	1480	3082	1596	3325	1716	3566	1907	4046	2068	4283	2290	4757	2416
41	2050	1868	988	2134	1072	2394	1255	2652	1382	2906	1517	3159	1636	3408	1759	3656	1955	4148	2120	4390	2348	4876	2476
42	2100	1914	1012	2186	1098	2453	1285	2717	1415	2977	1554	3236	1676	3491	1802	3745	2003	4249	2171	4497	2405	4995	2537
43	2150	1959	1036	2238	1124	2511	1316	2781	1449	3048	1591	3313	1716	3574	1845	3834	2050	4350	2223	4604	2462	5114	2597
44	2200	2005	1060	2290	1150	2570	1346	2846	1483	3119	1628	3390	1756	3657	1888	3923	2098	4451	2275	4711	2519	5232	2658
45	2250	2050	1085	2342	1176	2628	1377	2911	1517	3190	1665	3467	1796	3740	1931	4012	2146	4552	2327	4818	2577	5351	2718
46	2300	2096	1109	2394	1202	2686	1408	2975	1550	3260	1702	3544	1835	3824	1973	4101	2193	4653	2378	4925	2634	5470	2778
47	2350	2141	1133	2446	1229	2745	1438	3040	1584	3331	1739	3621	1875	3907	2016	4191	2241	4755	2430	5032	2691	5589	2839
48	2400	2187	1157	2498	1255	2803	1469	3105	1618	3402	1776	3698	1915	3990	2059	4280	2289	4856	2482	5139	2749	5708	2899
49	2450	2232	1181	2550	1281	2862	1499	3169	1651	3473	1813	3775	1955	4073	2102	4369	2336	4957	2533	5246	2806	5827	2960
50	2500	2278	1205	2602	1307	2920	1530	3234	1685	3544	1850	3852	1995	4156	2145	4458	2384	5058	2585	5354	2863	5946	3020



Exponent 'n'		1.32		1.33		1.34		1.35		1.35		1.35		1.35		1.34		1.32		1.32	
Height (mm)		1000		1100		1200		1500		1800		2000		2200		2500		2800		3000	
Sections	Length (mm)	Output (Watts)																			
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	523	264	570	286	616	308	756	376	896	446	989	492	1084	539	1225	613	1371	690	1469	743
5	250	653	331	712	358	770	385	945	471	1120	557	1237	615	1355	674	1532	766	1714	862	1836	929
6	300	784	397	854	430	924	462	1134	565	1344	668	1484	739	1626	809	1838	919	2057	1034	2204	1114
7	350	915	463	997	501	1078	539	1323	659	1567	780	1731	862	1897	944	2144	1072	2400	1207	2571	1300
8	400	1045	529	1139	573	1232	616	1512	753	1791	891	1979	985	2167	1078	2450	1226	2743	1379	2938	1486
9	450	1176	595	1281	644	1386	693	1701	847	2015	1003	2226	1108	2438	1213	2757	1379	3085	1552	3305	1671
10	500	1307	661	1424	716	1540	770	1890	941	2239	1114	2474	1231	2709	1348	3063	1532	3428	1724	3673	1857
11	550	1437	727	1566	788	1694	847	2079	1035	2463	1225	2721	1354	2980	1483	3369	1685	3771	1896	4040	2043
12	600	1568	793	1709	859	1848	924	2268	1129	2687	1337	2968	1477	3251	1618	3676	1838	4114	2069	4407	2228
13	650	1699	859	1851	931	2003	1001	2456	1223	2911	1448	3216	1600	3522	1752	3982	1992	4457	2241	4774	2414
14	700	1830	925	1993	1002	2157	1078	2645	1317	3135	1560	3463	1723	3793	1887	4288	2145	4800	2414	5142	2600
15	750	1960	992	2136	1074	2311	1155	2834	1412	3359	1671	3710	1846	4064	2022	4595	2298	5142	2586	5509	2786
16	800	2091	1058	2278	1146	2465	1232	3023	1506	3583	1782	3958	1970	4335	2157	4901	2451	5485	2758	5876	2971
17	850	2222	1124	2420	1217	2619	1309	3212	1600	3807	1894	4205	2093	4606	2292	5207	2604	5828	2931	6244	3157
18	900	2352	1190	2563	1289	2773	1386	3401	1694	4031	2005	4452	2216	4877	2426	5513	2758	6171	3103	6611	3343
19	950	2483	1256	2705	1360	2927	1463	3590	1788	4255	2117	4700	2339	5148	2561	5820	2911	6514	3276	6978	3528
20	1000	2614	1322	2848	1432	3081	1540	3779	1882	4479	2228	4947	2462	5419	2696	6126	3064	6857	3448	7345	3714
21	1050	2744	1388	2990	1504	3235	1617	3968	1976	4702	2339	5194	2585	5690	2831	6432	3217	7199	3620	7713	3900
22	1100	2875	1454	3132	1575	3389	1694	4157	2070	4926	2451	5442	2708	5961	2966	6739	3370	7542	3793	8080	4085
23	1150	3006	1520	3275	1647	3543	1771	4346	2164	5150	2562	5689	2831	6231	3100	7045	3524	7885	3965	8447	4271
24	1200	3136	1586	3417	1718	3697	1848	4535	2258	5374	2674	5937	2954	6502	3235	7351	3677	8228	4138	8814	4457
25	1250	3267	1653	3560	1790	3851	1925	4724	2353	5598	2785	6184	3077	6773	3370	7658	3830	8571	4310	9182	4643
26	1300	3398	1719	3702	1862	4005	2002	4913	2447	5822	2897	6431	3200	7044	3505	7964	3983	8914	4482	9549	4828
27	1350	3528	1785	3844	1933	4159	2079	5102	2541	6046	3008	6679	3324	7315	3640	8270	4136	9256	4655	9916	5014
28	1400	3659	1851	3987	2005	4313	2156	5291	2635	6270	3119	6926	3447	7586	3774	8576	4290	9599	4827	10283	5200
29	1450	3790	1917	4129	2076	4467	2233	5480	2729	6494	3231	7173	3570	7857	3909	8883	4443	9942	5000	10651	5385
30	1500	3920	1983	4271	2148	4621	2310	5669	2823	6718	3342	7421	3693	8128	4044	9189	4596	10285	5172	11018	5571
31	1550	4051	2049	4414	2220	4775	2387	5858	2917	6942	3454	7668	3816	-	-	-	-	-	-	-	-
32	1600	4182	2115	4556	2291	4929	2464	6047	3011	7166	3565	7915	3939	-	-	-	-	-	-	-	-
33	1650	4312	2181	4699	2363	5083	2541	6236	3105	7390	3676	8163	4062	-	-	-	-	-	-	-	-
34	1700	4443	2247	4841	2434	5237	2618	6425	3199	7614	3788	8410	4185	-	-	-	-	-	-	-	-
35	1750	4574	2314	4983	2506	5391	2695	6614	3294	7837	3899	8657	4308	-	-	-	-	-	-	-	-
36	1800	4704	2380	5126	2578	5545	2772	6803	3388	8061	4011	8905	4431	-	-	-	-	-	-	-	-
37	1850	4835	2446	5268	2649	5699	2849	6992	3482	8285	4122	9152	4555	-	-	-	-	-	-	-	-
38	1900	4966	2512	5410	2721	5854	2926	7180	3576	8509	4233	9400	4678	-	-	-	-	-	-	-	-
39	1950	5097	2578	5553	2792	6008	3003	7369	3670	8733	4345	9647	4801	-	-	-	-	-	-	-	-
40	2000	5227	2644	5695	2864	6162	3080	7558	3764	8957	4456	9894	4924	-	-	-	-	-	-	-	-
41	2050	5358	2710	5838	2936	6316	3157	7747	3858	9181	4568	10142	5047	-	-	-	-	-	-	-	-
42	2100	5489	2776	5980	3007	6470	3234	7936	3952	9405	4679	10389	5170	-	-	-	-	-	-	-	-
43	2150	5619	2842	6122	3079	6624	3311	8125	4046	-	-	-	-	-	-	-	-	-	-	-	-
44	2200	5750	2908	6265	3150	6778	3388	8314	4140	-	-	-	-	-	-	-	-	-	-	-	-
45	2250	5881	2975	6407	3222	6932	3465	8503	4235	-	-	-	-	-	-	-	-	-	-	-	-
46	2300	6011	3041	6549	3294	7086	3542	8692	4329	-	-	-	-	-	-	-	-	-	-	-	-
47	2350	6142	3107	6692	3365	7240	3619	8881	4423	-	-	-	-	-	-	-	-	-	-	-	-
48	2400	6273	3173	6834	3437	7394	3696	9070	4517	-	-	-	-	-	-	-	-	-	-	-	-
49	2450	6403	3239	6977	3508	7548	3773	9259	4611	-	-	-	-	-	-	-	-	-	-	-	-
50	2500	6534	3305	7119	3580	7702	3850	9448	4705	-	-	-	-	-	-	-	-	-	-	-	-


NOTE:
All outputs are in accordance with BS EN442 certification.
'n' = average exponent value.
Due to manufacturing tolerances of sectional Multicolumn Plus radiators, dimensions shown are subject to slight variance.
Height: Up to 1mm, Length: 0% up to +1%.

 Indicates weight of over 100kg

Heat Outputs

5 Column Radiators

Exponent 'n'		1.24		1.25		1.26		1.26		1.27		1.28		1.28		1.29		1.30		1.30		1.31	
Height (mm)		300		350		400		450		500		550		600		650		750		800		900	
Sections	Length (mm)	Output (Watts)																					
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	224	118	256	134	288	150	319	166	349	181	380	196	410	212	440	235	499	255	529	283	587	298
5	250	280	148	320	168	359	188	398	208	437	227	475	245	512	265	550	294	624	319	661	353	734	373
6	300	336	177	384	201	431	225	478	249	524	272	570	294	615	317	660	353	749	382	793	424	881	448
7	350	392	207	448	235	503	263	557	291	611	317	665	343	717	370	770	412	874	446	925	495	1028	522
8	400	448	236	512	268	575	300	637	332	699	362	760	392	820	423	880	470	998	510	1057	565	1174	597
9	450	504	266	576	302	647	338	717	374	786	408	854	441	922	476	990	529	1123	573	1189	636	1321	671
10	500	560	295	640	335	719	375	796	415	873	453	949	490	1025	529	1100	588	1248	637	1321	707	1468	746
11	550	616	325	704	369	791	413	876	457	961	498	1044	539	1127	582	1210	647	1373	701	1453	777	1615	821
12	600	672	354	768	402	863	450	956	498	1048	544	1139	588	1230	635	1320	706	1498	764	1586	848	1762	895
13	650	728	384	832	436	934	488	1035	540	1135	589	1234	637	1332	688	1429	764	1622	828	1718	919	1908	970
14	700	784	413	896	469	1006	525	1115	581	1222	634	1329	686	1435	741	1539	823	1747	892	1850	989	2055	1044
15	750	840	443	960	503	1078	563	1195	623	1310	680	1424	735	1537	794	1649	882	1872	956	1982	1060	2202	1119
16	800	896	472	1024	536	1150	600	1274	664	1397	725	1519	784	1640	846	1759	941	1997	1019	2114	1131	2349	1194
17	850	952	502	1088	570	1222	638	1354	706	1484	770	1614	833	1742	899	1869	1000	2122	1083	2246	1201	2496	1268
18	900	1008	531	1152	603	1294	675	1434	747	1572	815	1709	882	1845	952	1979	1059	2246	1147	2378	1272	2642	1343
19	950	1064	561	1216	637	1366	713	1513	789	1659	861	1804	931	1947	1005	2089	1117	2371	1210	2510	1343	2789	1417
20	1000	1120	590	1280	670	1438	750	1593	830	1746	906	1899	980	2050	1058	2199	1176	2496	1274	2643	1413	2936	1492
21	1050	1176	620	1344	704	1509	788	1672	872	1834	951	1994	1029	2152	1111	2309	1235	2621	1338	2775	1484	3083	1567
22	1100	1232	649	1408	737	1581	825	1752	913	1921	997	2089	1078	2255	1164	2419	1294	2746	1401	2907	1555	3230	1641
23	1150	1288	679	1472	771	1653	863	1832	955	2008	1042	2184	1127	2357	1217	2529	1353	2870	1465	3039	1625	3376	1716
24	1200	1344	708	1536	804	1725	900	1911	996	2096	1087	2279	1176	2460	1270	2639	1411	2995	1529	3171	1696	3523	1790
25	1250	1400	738	1600	838	1797	938	1991	1038	2183	1133	2374	1225	2562	1323	2749	1470	3120	1593	3303	1767	3670	1865
26	1300	1455	767	1664	871	1869	975	2071	1079	2270	1178	2468	1274	2664	1375	2859	1529	3245	1656	3435	1837	3817	1940
27	1350	1511	797	1728	905	1941	1013	2150	1121	2358	1223	2563	1323	2767	1428	2969	1588	3370	1720	3568	1908	3964	2014
28	1400	1567	826	1792	938	2013	1050	2230	1162	2445	1268	2658	1372	2869	1481	3079	1647	3494	1784	3700	1979	4110	2089
29	1450	1623	856	1856	972	2085	1088	2310	1204	2532	1314	2753	1421	2972	1534	3189	1705	3619	1847	3832	2049	4257	2163
30	1500	1679	885	1920	1005	2156	1125	2389	1245	2620	1359	2848	1470	3074	1587	3299	1764	3744	1911	3964	2120	4404	2238
31	1550	1735	915	1984	1039	2228	1163	2469	1287	2707	1404	2943	1519	3177	1640	3409	1823	3869	1975	4096	2191	4551	2313
32	1600	1791	944	2048	1072	2300	1200	2548	1328	2794	1450	3038	1568	3279	1693	3519	1882	3994	2038	4228	2261	4698	2387
33	1650	1847	974	2112	1106	2372	1238	2628	1370	2882	1495	3133	1617	3382	1746	3629	1941	4118	2102	4360	2332	4844	2462
34	1700	1903	1003	2176	1139	2444	1275	2708	1411	2969	1540	3228	1666	3484	1799	3739	1999	4243	2166	4492	2403	4991	2536
35	1750	1959	1033	2240	1173	2516	1313	2787	1453	3056	1586	3323	1715	3587	1852	3849	2058	4368	2230	4625	2473	5138	2611
36	1800	2015	1062	2304	1206	2588	1350	2867	1494	3144	1631	3418	1764	3689	1904	3959	2117	4493	2293	4757	2544	5285	2686
37	1850	2071	1092	2368	1240	2660	1388	2947	1536	3231	1676	3513	1813	3792	1957	4069	2176	4618	2357	4889	2615	5432	2760
38	1900	2127	1121	2432	1273	2731	1425	3026	1577	3318	1721	3608	1862	3894	2010	4178	2235	4742	2421	5021	2685	5578	2835
39	1950	2183	1151	2496	1307	2803	1463	3106	1619	3405	1767	3703	1911	3997	2063	4288	2293	4867	2484	5153	2756	5725	2909
40	2000	2239	1180	2560	1340	2875	1500	3186	1660	3493	1812	3798	1960	4099	2116	4398	2352	4992	2548	5285	2827	5872	2984
41	2050	2295	1210	2624	1374	2947	1538	3265	1702	3580	1857	3893	2009	4202	2169	4508	2411	5117	2612	5417	2897	6019	3059
42	2100	2351	1239	2688	1407	3019	1575	3345	1743	3667	1903	3987	2058	4304	2222	4618	2470	5242	2675	5549	2968	6166	3133
43	2150	2407	1269	2752	1441	3091	1613	3425	1785	3755	1948	4082	2107	4407	2275	4728	2529	5366	2739	5682	3039	6312	3208
44	2200	2463	1298	2816	1474	3163	1650	3504	1826	3842	1993	4177	2156	4509	2328	4838	2587	5491	2803	5814	3109	6459	3282
45	2250	2519	1328	2880	1508	3235	1688	3584	1868	3929	2039	4272	2205	4612	2381	4948	2646	5616	2867	5946	3180	6606	3357
46	2300	2575	1357	2944	1541	3306	1725	3663	1909	4017	2084	4367	2254	4714	2433	5058	2705	5741	2930	6078	3251	6753	3432
47	2350	2631	1387	3008	1575	3378	1763	3743	1951	4104	2129	4462	2303	4817	2486	5168	2764	5866	2994	6210	3321	6900	3506
48	2400	2687	1416	3072	1608	3450	1800	3823	1992	4191	2174	4557	2352	4919	2539	5278	2823	5990	3058	6342	3392	7046	3581
49	2450	2743	1446	3136	1642	3522	1838	3902	2034	4279	2220	4652	2401	5022	2592	5388	2882	6115	3121	6474	3462	7193	3655
50	2500	2799	1475	3200	1675	3594	1875	3982	2075	4366	2265	4747	2450	5124	2645	5498	2940	6240	3185	6607	3533	7340	3730



Exponent 'n'		1.32		1.33		1.34		1.35		1.35		1.35		1.34		1.33		1.31		1.30
Height (mm)		1000		1100		1200		1500		1800		2000		2200		2500		2800		3000
Sections	Length (mm)	Output (Watts)																		
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50
4	200	645	326	703	354	761	381	933	464	1105	550	1219	607	1335	668	1509	759	1685	856	1803
5	250	807	408	879	442	951	476	1166	581	1381	687	1524	759	1668	835	1886	949	2106	1070	2254
6	300	968	489	1055	530	1141	571	1399	697	1657	824	1829	910	2002	1001	2263	1138	2527	1284	2705
7	350	1129	571	1230	619	1331	666	1632	813	1933	962	2134	1062	2336	1168	2640	1328	2948	1498	3156
8	400	1291	652	1406	707	1521	762	1865	929	2209	1099	2439	1214	2669	1335	3018	1518	3369	1712	3606
9	450	1452	734	1582	796	1712	857	2099	1045	2485	1237	2744	1365	3003	1502	3395	1707	3791	1926	4057
10	500	1613	815	1758	884	1902	952	2332	1161	2761	1374	3049	1517	3337	1669	3772	1897	4212	2140	4508
11	550	1775	897	1934	972	2092	1047	2565	1277	3037	1511	3354	1669	3670	1836	4149	2087	4633	2354	4959
12	600	1936	978	2109	1061	2282	1142	2798	1393	3314	1649	3658	1820	4004	2003	4526	2276	5054	2568	5410
13	650	2097	1060	2285	1149	2472	1238	3031	1509	3590	1786	3963	1972	4338	2170	4904	2466	5475	2782	5860
14	700	2258	1141	2461	1238	2663	1333	3264	1626	3866	1924	4268	2124	4671	2337	5281	2656	5896	2996	6311
15	750	2420	1223	2637	1326	2853	1428	3498	1742	4142	2061	4573	2276	5005	2504	5658	2846	6318	3210	6762
16	800	2581	1304	2812	1414	3043	1523	3731	1858	4418	2198	4878	2427	5339	2670	6035	3035	6739	3424	7213
17	850	2742	1386	2988	1503	3233	1618	3964	1974	4694	2336	5183	2579	5672	2837	6412	3225	7160	3638	7663
18	900	2904	1467	3164	1591	3423	1714	4197	2090	4970	2473	5488	2731	6006	3004	6790	3415	7581	3852	8114
19	950	3065	1549	3340	1680	3613	1809	4430	2206	5247	2611	5792	2882	6340	3171	7167	3604	8002	4066	8565
20	1000	3226	1630	3516	1768	3804	1904	4664	2322	5523	2748	6097	3034	6673	3338	7544	3794	8423	4280	9016
21	1050	3388	1712	3691	1856	3994	1999	4897	2438	5799	2885	6402	3186	7007	3505	7921	3984	8845	4494	9467
22	1100	3549	1793	3867	1945	4184	2094	5130	2554	6075	3023	6707	3337	7341	3672	8298	4173	9266	4708	9917
23	1150	3710	1875	4043	2033	4374	2190	5363	2671	6351	3160	7012	3489	7674	3839	8676	4363	9687	4922	10368
24	1200	3872	1956	4219	2122	4564	2285	5596	2787	6627	3298	7317	3641	8008	4006	9053	4553	10108	5136	10819
25	1250	4033	2038	4395	2210	4755	2380	5829	2903	6903	3435	7622	3793	8342	4173	9430	4743	10529	5350	-
26	1300	4194	2119	4570	2298	4945	2475	6063	3019	7179	3572	7927	3944	8675	4339	9807	4932	10950	5564	-
27	1350	4356	2201	4746	2387	5135	2570	6296	3135	7456	3710	8231	4096	9009	4506	10184	5122	11372	5778	-
28	1400	4517	2282	4922	2475	5325	2666	6529	3251	7732	3847	8536	4248	9343	4673	10562	5312	11793	5992	-
29	1450	4678	2364	5098	2564	5515	2761	6762	3367	8008	3985	8841	4399	9676	4840	10939	5501	12214	6206	-
30	1500	4840	2445	5273	2652	5705	2856	6995	3483	8284	4122	9146	4551	10010	5007	11316	5691	12635	6420	-
31	1550	5001	2527	5449	2740	5896	2951	7229	3599	-	-	-	-	-	-	-	-	-	-	-
32	1600	5162	2608	5625	2829	6086	3046	7462	3716	-	-	-	-	-	-	-	-	-	-	-
33	1650	5324	2690	5801	2917	6276	3142	7695	3832	-	-	-	-	-	-	-	-	-	-	-
34	1700	5485	2771	5977	3006	6466	3237	7928	3948	-	-	-	-	-	-	-	-	-	-	-
35	1750	5646	2853	6152	3094	6656	3332	8161	4064	-	-	-	-	-	-	-	-	-	-	-
36	1800	5808	2934	6328	3182	6846	3427	8394	4180	-	-	-	-	-	-	-	-	-	-	-
37	1850	5969	3016	6504	3271	7037	3522	8628	4296	-	-	-	-	-	-	-	-	-	-	-
38	1900	6130	3097	6680	3359	7227	3618	8861	4412	-	-	-	-	-	-	-	-	-	-	-
39	1950	6291	3179	6855	3448	7417	3713	9094	4528	-	-	-	-	-	-	-	-	-	-	-
40	2000	6453	3260	7031	3536	7607	3808	9327	4644	-	-	-	-	-	-	-	-	-	-	-
41	2050	6614	3342	7207	3624	7797	3903	9560	4761	-	-	-	-	-	-	-	-	-	-	-
42	2100	6775	3423	7383	3713	7988	3998	9793	4877	-	-	-	-	-	-	-	-	-	-	-
43	2150	6937	3505	7559	3801	8178	4094	10027	4993	-	-	-	-	-	-	-	-	-	-	-
44	2200	7098	3586	7734	3890	8368	4189	10260	5109	-	-	-	-	-	-	-	-	-	-	-
45	2250	7259	3668	7910	3978	8558	4284	10493	5225	-	-	-	-	-	-	-	-	-	-	-
46	2300	7421	3749	8086	4066	8748	4379	-	-	-	-	-	-	-	-	-	-	-	-	-
47	2350	7582	3831	8262	4155	8938	4474	-	-	-	-	-	-	-	-	-	-	-	-	-
48	2400	7743	3912	8437	4243	9129	4570	-	-	-	-	-	-	-	-	-	-	-	-	-
49	2450	7905	3994	8613	4332	9319	4665	-	-	-	-	-	-	-	-	-	-	-	-	-
50	2500	8066	4075	8789	4420	9509	4760	-	-	-	-	-	-	-	-	-	-	-	-	-

NOTE:

All outputs are in accordance with BS EN442 certification.

'n' = average exponent value.

Due to manufacturing tolerances of sectional Multicolumn Plus radiators, dimensions shown are subject to slight variance.


Height: Up to 1mm, Length: 0% up to +1%.

 Indicates weight of over 100kg

Heat Outputs

6 Column Radiators

Exponent 'n'		1.25		1.26		1.26		1.27		1.28		1.28		1.29		1.29		1.30		1.30		1.31	
Height (mm)		300		350		400		450		500		550		600		650		750		800		900	
Sections	Length (mm)	Output (Watts)																					
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	266	139	304	158	341	178	378	196	415	214	451	233	487	250	523	280	594	303	629	336	699	355
5	250	332	174	380	198	427	223	473	246	519	268	564	291	609	313	654	350	742	379	786	420	873	444
6	300	398	209	456	238	512	267	568	295	623	322	677	349	731	375	785	420	891	455	943	504	1048	533
7	350	465	244	532	277	597	312	662	344	726	375	790	407	853	438	915	489	1039	531	1100	588	1223	622
8	400	531	278	608	317	683	356	757	393	830	429	903	466	975	500	1046	559	1188	606	1257	672	1397	710
9	450	598	313	683	356	768	401	851	442	934	482	1016	524	1097	563	1177	629	1336	682	1415	757	1572	799
10	500	664	348	759	396	853	445	946	491	1038	536	1128	582	1218	625	1308	699	1485	758	1572	841	1747	888
11	550	730	383	835	436	939	490	1041	540	1141	590	1241	640	1340	688	1438	769	1633	834	1729	925	1921	977
12	600	797	418	911	475	1024	534	1135	589	1245	643	1354	698	1462	750	1569	839	1782	910	1886	1009	2096	1066
13	650	863	452	987	515	1109	579	1230	638	1349	697	1467	757	1584	813	1700	909	1930	985	2043	1093	2271	1154
14	700	930	487	1063	554	1195	623	1324	687	1453	750	1580	815	1706	875	1831	979	2078	1061	2201	1177	2445	1243
15	750	996	522	1139	594	1280	668	1419	737	1556	804	1693	873	1828	938	1961	1049	2227	1137	2358	1261	2620	1332
16	800	1062	557	1215	634	1365	712	1514	786	1660	858	1805	931	1949	1000	2092	1119	2375	1213	2515	1345	2795	1421
17	850	1129	592	1291	673	1451	757	1608	835	1764	911	1918	989	2071	1063	2223	1189	2524	1289	2672	1429	2969	1510
18	900	1195	626	1367	713	1536	801	1703	884	1868	965	2031	1048	2193	1125	2354	1259	2672	1364	2829	1513	3144	1598
19	950	1262	661	1443	752	1621	846	1797	933	1971	1018	2144	1106	2315	1188	2484	1329	2821	1440	2986	1597	3319	1687
20	1000	1328	696	1519	792	1707	890	1892	982	2075	1072	2257	1164	2437	1250	2615	1399	2969	1516	3144	1681	3493	1776
21	1050	1394	731	1595	832	1792	935	1987	1031	2179	1126	2370	1222	2559	1313	2746	1468	3118	1592	3301	1765	3668	1865
22	1100	1461	766	1671	871	1877	979	2081	1080	2283	1179	2482	1280	2680	1375	2877	1538	3266	1668	3458	1849	3843	1954
23	1150	1527	800	1747	911	1963	1024	2176	1129	2386	1233	2595	1339	2802	1438	3007	1608	3415	1743	3615	1933	4017	2042
24	1200	1594	835	1823	950	2048	1068	2270	1178	2490	1286	2708	1397	2924	1500	3138	1678	3563	1819	3772	2017	4192	2131
25	1250	1660	870	1899	990	2134	1113	2365	1228	2594	1340	2821	1455	3046	1563	3269	1748	3712	1895	3930	2101	4367	2220
26	1300	1726	905	1974	1030	2219	1157	2460	1277	2698	1394	2934	1513	3168	1625	3400	1818	3860	1971	4087	2186	4541	2309
27	1350	1793	940	2050	1069	2304	1202	2554	1326	2802	1447	3047	1571	3290	1688	3530	1888	4008	2047	4244	2270	4716	2398
28	1400	1859	974	2126	1109	2390	1246	2649	1375	2905	1501	3160	1630	3412	1750	3661	1958	4157	2122	4401	2354	4890	2486
29	1450	1926	1009	2202	1148	2475	1291	2743	1424	3009	1554	3272	1688	3533	1813	3792	2028	4305	2198	4558	2438	5065	2575
30	1500	1992	1044	2278	1188	2560	1335	2838	1473	3113	1608	3385	1746	3655	1875	3923	2098	4454	2274	4715	2522	5240	2664
31	1550	2058	1079	2354	1228	2646	1380	2933	1522	3217	1662	3498	1804	3777	1938	4053	2168	4602	2350	4873	2606	5414	2753
32	1600	2125	1114	2430	1267	2731	1424	3027	1571	3320	1715	3611	1862	3899	2000	4184	2238	4751	2426	5030	2690	5589	2842
33	1650	2191	1148	2506	1307	2816	1469	3122	1620	3424	1769	3724	1921	4021	2063	4315	2308	4899	2501	5187	2774	5764	2930
34	1700	2258	1183	2582	1346	2902	1513	3216	1669	3528	1822	3837	1979	4143	2125	4446	2377	5048	2577	5344	2858	5938	3019
35	1750	2324	1218	2658	1386	2987	1558	3311	1719	3632	1876	3949	2037	4264	2188	4576	2447	5196	2653	5501	2942	6113	3108
36	1800	2390	1253	2734	1426	3072	1602	3406	1768	3735	1930	4062	2095	4386	2250	4707	2517	5345	2729	5658	3026	6288	3197
37	1850	2457	1288	2810	1465	3158	1647	3500	1817	3839	1983	4175	2153	4508	2313	4838	2587	5493	2805	5816	3110	6462	3286
38	1900	2523	1322	2886	1505	3243	1691	3595	1866	3943	2037	4288	2212	4630	2375	4969	2657	5641	2880	5973	3194	6637	3374
39	1950	2590	1357	2962	1544	3328	1736	3689	1915	4047	2090	4401	2270	4752	2438	5099	2727	5790	2956	6130	3278	6812	3463
40	2000	2656	1392	3038	1584	3414	1780	3784	1964	4150	2144	4514	2328	4874	2500	5230	2797	5938	3032	6287	3362	6986	3552
41	2050	2722	1427	3114	1624	3499	1825	3879	2013	4254	2198	4626	2386	4995	2563	5361	2867	6087	3108	6444	3446	7161	3641
42	2100	2789	1462	3189	1663	3584	1869	3973	2062	4358	2251	4739	2444	5117	2625	5492	2937	6235	3184	6602	3531	7336	3730
43	2150	2855	1496	3265	1703	3670	1914	4068	2111	4462	2305	4852	2503	5239	2688	5622	3007	6384	3259	6759	3615	7510	3818
44	2200	2922	1531	3341	1742	3755	1958	4162	2160	4565	2358	4965	2561	5361	2750	5753	3077	6532	3335	6916	3699	7685	3907
45	2250	2988	1566	3417	1782	3840	2003	4257	2210	4669	2412	5078	2619	5483	2813	5884	3147	6681	3411	7073	3783	7860	3996
46	2300	3054	1601	3493	1822	3926	2047	4352	2259	4773	2466	5191	2677	5605	2875	6015	3217	6829	3487	7230	3867	8034	4085
47	2350	3121	1636	3569	1861	4011	2092	4446	2308	4877	2519	5303	2735	5726	2938	6145	3286	6978	3563	7387	3951	8209	4174
48	2400	3187	1670	3645	1901	4096	2136	4541	2357	4980	2573	5416	2794	5848	3000	6276	3356	7126	3638	7545	4035	8384	4262
49	2450	3254	1705	3721	1940	4182	2181	4635	2406	5084	2626	5529	2852	5970	3063	6407	3426	7275	3714	7702	4119	8558	4351
50	2500	3320	1740	3797	1980	4267	2225	4730	2455	5188	2680	5642	2910	6092	3125	6538	3496	7423	3790	7859	4203	8733	4440



Exponent 'n'		1.32		1.33		1.33		1.34		1.35		1.34		1.34		1.32		1.30		1.28	
Height (mm)		1000		1100		1200		1500		1800		2000		2200		2500		2800		3000	
Sections	Length (mm)	Output (Watts)																			
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	768	388	837	421	905	455	1110	555	1313	654	1449	725	1586	793	1790	906	1998	1020	2137	1103
5	250	960	486	1046	526	1131	569	1387	694	1642	817	1812	907	1982	991	2238	1132	2498	1275	2671	1379
6	300	1152	583	1255	631	1358	683	1664	833	1970	980	2174	1088	2378	1190	2685	1358	2997	1531	3206	1654
7	350	1344	680	1464	736	1584	797	1942	971	2299	1144	2536	1269	2775	1388	3133	1585	3497	1786	3740	1930
8	400	1536	777	1673	842	1810	910	2219	1110	2627	1307	2899	1450	3171	1586	3580	1811	3996	2041	4274	2206
9	450	1728	874	1882	947	2037	1024	2497	1249	2955	1471	3261	1632	3568	1785	4028	2038	4496	2296	4808	2481
10	500	1920	971	2092	1052	2263	1138	2774	1388	3284	1634	3623	1813	3964	1983	4475	2264	4995	2551	5343	2757
11	550	2112	1068	2301	1157	2489	1252	3051	1527	3612	1797	3986	1994	4361	2181	4923	2491	5495	2806	5877	3033
12	600	2304	1165	2510	1262	2715	1366	3329	1665	3940	1961	4348	2176	4757	2380	5370	2717	5994	3061	6411	3309
13	650	2495	1262	2719	1368	2942	1479	3606	1804	4269	2124	4710	2357	5153	2578	5818	2943	6494	3316	6946	3584
14	700	2687	1359	2928	1473	3168	1593	3884	1943	4597	2288	5073	2538	5550	2776	6265	3170	6993	3571	7480	3860
15	750	2879	1457	3137	1578	3394	1707	4161	2082	4925	2451	5435	2720	5946	2974	6713	3396	7493	3826	8014	4136
16	800	3071	1554	3346	1683	3621	1821	4438	2221	5254	2614	5797	2901	6343	3173	7160	3623	7992	4082	8548	4412
17	850	3263	1651	3556	1788	3847	1935	4716	2359	5582	2778	6160	3082	6739	3371	7608	3849	8492	4337	9083	4687
18	900	3455	1748	3765	1894	4073	2048	4993	2498	5911	2941	6522	3263	7135	3569	8055	4075	8991	4592	9617	4963
19	950	3647	1845	3974	1999	4299	2162	5271	2637	6239	3105	6884	3445	7532	3768	8503	4302	9491	4847	-	-
20	1000	3839	1942	4183	2104	4526	2276	5548	2776	6567	3268	7247	3626	7928	3966	8950	4528	9990	5102	-	-
21	1050	4031	2039	4392	2209	4752	2390	5825	2914	6896	3431	7609	3807	8325	4164	9398	4755	10490	5357	-	-
22	1100	4223	2136	4601	2314	4978	2504	6103	3053	7224	3595	7971	3989	8721	4362	9845	4981	-	-	-	-
23	1150	4415	2233	4811	2420	5205	2617	6380	3192	7552	3758	8334	4170	9118	4561	10293	5208	-	-	-	-
24	1200	4607	2330	5020	2525	5431	2731	6658	3331	7881	3922	8696	4351	9514	4759	10740	5434	-	-	-	-
25	1250	4799	2428	5229	2630	5657	2845	6935	3470	8209	4085	9058	4533	-	-	-	-	-	-	-	-
26	1300	4991	2525	5438	2735	5884	2959	7212	3608	8538	4248	9421	4714	-	-	-	-	-	-	-	-
27	1350	5183	2622	5647	2840	6110	3073	7490	3747	8866	4412	9783	4895	-	-	-	-	-	-	-	-
28	1400	5375	2719	5856	2946	6336	3186	7767	3886	9194	4575	10145	5076	-	-	-	-	-	-	-	-
29	1450	5567	2816	6066	3051	6562	3300	8045	4025	9523	4739	10508	5258	-	-	-	-	-	-	-	-
30	1500	5759	2913	6275	3156	6789	3414	8322	4164	9851	4902	10870	5439	-	-	-	-	-	-	-	-
31	1550	5951	3010	6484	3261	7015	3528	8599	4302	-	-	-	-	-	-	-	-	-	-	-	-
32	1600	6143	3107	6693	3366	7241	3642	8877	4441	-	-	-	-	-	-	-	-	-	-	-	-
33	1650	6335	3204	6902	3472	7468	3755	9154	4580	-	-	-	-	-	-	-	-	-	-	-	-
34	1700	6527	3301	7111	3577	7694	3869	9432	4719	-	-	-	-	-	-	-	-	-	-	-	-
35	1750	6719	3399	7320	3682	7920	3983	9709	4857	-	-	-	-	-	-	-	-	-	-	-	-
36	1800	6911	3496	7530	3787	8146	4097	9986	4996	-	-	-	-	-	-	-	-	-	-	-	-
37	1850	7103	3593	7739	3892	8373	4211	10264	5135	-	-	-	-	-	-	-	-	-	-	-	-
38	1900	7294	3690	7948	3998	8599	4324	10541	5274	-	-	-	-	-	-	-	-	-	-	-	-
39	1950	7486	3787	8157	4103	8825	4438	10819	5413	-	-	-	-	-	-	-	-	-	-	-	-
40	2000	7678	3884	8366	4208	9052	4552	-	-	-	-	-	-	-	-	-	-	-	-	-	-
41	2050	7870	3981	8575	4313	9278	4666	-	-	-	-	-	-	-	-	-	-	-	-	-	-
42	2100	8062	4078	8785	4418	9504	4780	-	-	-	-	-	-	-	-	-	-	-	-	-	-
43	2150	8254	4175	8994	4524	9730	4893	-	-	-	-	-	-	-	-	-	-	-	-	-	-
44	2200	8446	4272	9203	4629	9957	5007	-	-	-	-	-	-	-	-	-	-	-	-	-	-
45	2250	8638	4370	9412	4734	10183	5121	-	-	-	-	-	-	-	-	-	-	-	-	-	-
46	2300	8830	4467	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
47	2350	9022	4564	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
48	2400	9214	4661	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
49	2450	9406	4758	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50	2500	9598	4855	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

NOTE:

All outputs are in accordance with BS EN442 certification.

'n' = average exponent value.

Due to manufacturing tolerances of sectional Multicolumn Plus radiators, dimensions shown are subject to slight variance.

Height: Up to 1mm, Length: 0% up to +1%.

 Indicates weight of over 100kg

Weight & Water Contents

Multicolumn Plus

Dry Weight per Section (Kg)					
Height (mm)	2 Column	3 Column	4 Column	5 Column	6 Column
300	0.52	0.78	1.05	1.30	1.57
350	0.60	0.89	1.20	1.49	1.86
400	0.68	1.00	1.35	1.67	2.02
450	0.75	1.12	1.49	1.86	2.24
500	0.83	1.23	1.64	2.04	2.46
550	0.91	1.34	1.79	2.23	2.68
600	0.98	1.46	1.94	2.42	2.91
650	1.08	1.60	2.14	2.66	3.20
750	1.21	1.79	2.39	2.97	3.58
800	1.29	1.91	2.54	3.16	3.81
900	1.44	2.13	2.84	3.53	4.24
1000	1.59	2.36	3.14	3.91	4.69
1100	1.75	2.59	3.44	4.28	5.14
1200	1.90	2.81	3.74	4.65	5.58
1500	2.36	3.49	4.64	5.77	6.92
1800	2.82	4.17	5.53	6.88	8.25
2000	3.12	4.62	6.13	7.63	9.15
2200	3.43	5.07	6.73	8.38	10.04
2500	3.89	5.75	7.63	9.49	11.37
2800	4.34	6.43	8.53	10.61	12.71
3000	4.65	6.88	9.12	11.35	13.60

Water Content per Section (l)					
Height (mm)	2 Column	3 Column	4 Column	5 Column	6 Column
300	0.40	0.57	0.75	0.93	1.11
350	0.44	0.64	0.84	1.03	1.23
400	0.49	0.70	0.92	1.14	1.35
450	0.53	0.76	1.01	1.24	1.48
500	0.57	0.83	1.09	1.34	1.60
550	0.62	0.89	1.17	1.45	1.73
600	0.66	0.96	1.26	1.55	1.85
650	0.71	1.02	1.34	1.655	1.975
750	0.80	1.15	1.51	1.86	2.22
800	0.84	1.22	1.60	1.97	2.35
900	0.93	1.34	1.76	2.17	2.59
1000	1.02	1.47	1.93	2.38	2.84
1100	1.11	1.60	2.10	2.59	3.10
1200	1.19	1.73	2.27	2.80	3.33
1500	1.46	2.11	2.77	3.42	4.08
1800	1.72	2.49	3.27	4.04	4.82
2000	1.90	2.75	3.61	4.46	5.31
2200	2.08	3.01	3.94	4.87	5.81
2500	2.34	3.39	4.45	5.50	6.55
2800	2.61	3.78	4.95	6.12	7.29
3000	2.79	4.03	5.29	6.53	7.79

Interconnecting Information

Instructions for Delivery & Mounting of Sectional Blocks

Interconnections

Multicolumn Plus radiators are welded together from individual sections to form sectional blocks and finished radiators. According to the model and height, the number of sections that can be welded together to form a block is limited. This means that according to model and height, there is a maximum length for each block. If a radiator has been ordered whose number of sections is bigger than the maximum number of sections per block, the radiator will automatically be delivered in sectional blocks including nipples, seals and plugs. A radiator with welded back straps is then not available. The sectional blocks should be built up on site into a single radiator with a suitable nipping tool (see accessories) using the supplied nipples and nipple seals.

For radiators interconnected together you should also note:

- It cannot be delivered with a welded back strap.
- If a radiator is delivered in sectional blocks, the necessary accessories will be delivered with the radiator: nipples, seals and plugs.
- Before radiators are connected together, note left and right handed threads.

Block Lengths

In order to make the delivery and transport of Multicolumn Plus radiators to site easier, long length column radiators, according to model type and height are delivered in single sectional blocks. The maximum number of sections per block is shown in the table below.

Interconnecting Instructions

Multicolumn Plus radiators delivered to site in blocks should be assembled on site and connected using nipples. In order to ensure the radiators are water tight, only the original seals delivered with the radiator should be used to join the sections together. Other sealants should not be used. The connection of the individual blocks and nipples consists of 1" right and 1" left handed threads. On the inner side of the nipple, two hollows are located to which the nose of the nipping tool attaches when the radiator is being connected.

The maximum number of sections for blocks:

Height (mm)	Block Lengths				
	2 Column	3 Column	4 Column	5 Column	6 Column
	Max Sections per Block				
300	42	42	42	42	42
350	42	42	42	42	42
400	42	42	42	42	42
450	42	42	42	42	42
500	42	42	42	42	42
550	42	42	42	42	35
600	42	42	42	42	35
650	42	42	42	42	32
750	42	42	42	37	28
800	42	42	42	32	26
900	42	42	32	26	24
1000	42	42	32	26	22
1100	19	19	19	19	19
1200	19	19	19	19	19
1500	19	19	19	18	15
1800	19	19	19	16	13
2000	19	19	18	14	11
2200	19	19	16	12	10
2500	16	16	14	11	9
2800	16	16	12	10	8
3000	16	16	11	9	8

Important: Interconnected radiators should be lifted vertically for transportation in order to avoid bowing. Avoid pressure on the nipping connections.

Interconnecting Information

Instructions for Delivery & Mounting of Sectional Blocks (cont...)

In order to ensure a reliable seal around the nipples and plugs, please observe the following instructions carefully:

- > Lay the sectional block horizontally on a flat even surface. In order to protect the paint from damage, cardboard or similar should be laid underneath.
- > Carefully remove any paint or contamination from the connection point and surrounding surfaces.
- > Only use the original Multicolumn Plus radiator nipples and 1.5mm column seal (EPDM white). Other sealing materials should not be used.
- > Screw both nipples approximately one turn into the connections of a block, noting the right and left handed threads (left handed threads are carved on the thread coils).
- > Place one washer centrally over each nipple.
- > Connect the next sectional block to the nipple.
- > Feed the nippling tool through the connection of the last attached block into the nipple. The square edge of the nippling tool fits into the back of the nipple. The length of the nippling tool can be measured and specified in advance. Only use the correct nippling tool.
- > Turn the thread with the nippling tool, alternating between both nipples and screw the sectional blocks together (alternately top and bottom). Failure to tighten the nipples alternately will lead to leaks.
- > The torque should be 90+/-10Nm. Ensure nipples and plugs are not cross threaded.
- > Nipples screwed in one at a time will cause leaks.

Mounting the Plugs

After connecting together, Multicolumn Plus radiators are sealed with blanking plugs and then connected to the flow and return of the heating system. Blanking plugs with left and right handed threads as well as washers are delivered together with the radiator.

- > Only use the original Multicolumn Plus radiator blanking plugs and 2.6mm washers (EPDM white). Other sealing materials should not be used.
- > Sealing surfaces and threads should be checked for contamination.
- > Attach the washers to the blanking plugs.
- > Hand tighten the plugs, noting the left and right hand threads.
- > Before fully tightening the plugs, check again that the washer is centrally located so that the whole of the washer seals effectively and is not deformed.

- > Blanking plugs should only be fitted with a suitable tool (ring spanner or adjustable spanner) and the torque should be a maximum of 34Nm.
- > The 1" thread used in the radiator is not suitable for direct connection to the heating system. In order to ensure a tight seal, (if necessary with 1" adaptor - see accessories) only use the washers delivered with the radiator.

NIPPLE QUICK GUIDE:




- > Choose a flat surface.
- > Lay cardboard down.
- > Lay the radiator down carefully.
- > Ensure threads and sealing surfaces are free of dirt and paint residue.




- > Thread the original Multicolumn Plus radiator nipples one turn into one block (note left and right handed threads).
- > Attach the original Multicolumn Plus radiator washer to both nipples, ensuring it is centrally located.



- > Attach the next block to the nipple (ensure the radiator is horizontal and parallel).



- > Insert the nippling tool through one connection of the adjoining block.
- > Engage the square end of the nippling tool with the back of the nipple.
- > Alternately tighten both nipples in order to ensure equal uniform tightness (un-uniform connection will lead to leaks).




- > Final tightening should be done carefully - torque 90+/-10Nm.

Fixing Details

Mounting Positions, Dimensions & Wall Brackets


Bracket Set 1 & 2

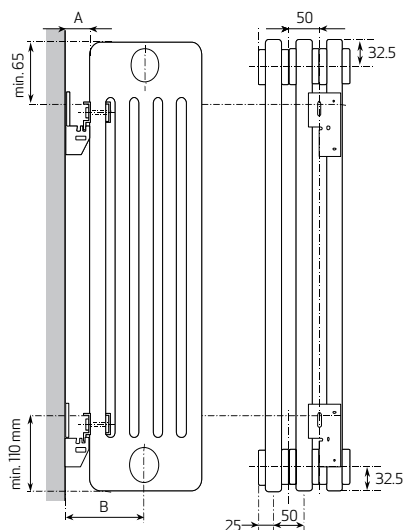


Bracket set with angled bracket

Bracket set 1: 4 sets
Bracket set 2: 6 sets

(Standard brackets - included with every product)

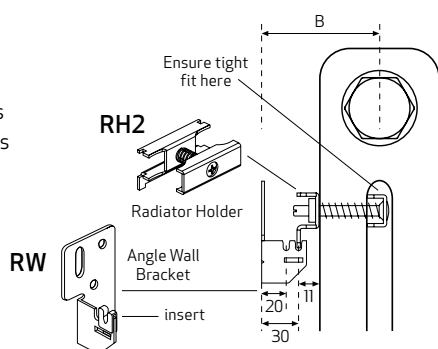


Bracket Set 3 & 4

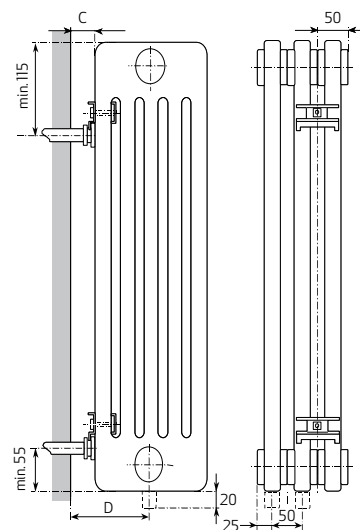


Bracket set with drill bracket

Bracket set 3: 4 sets
Bracket set 4: 6 sets



Model	Nominal Depth (mm)	Brackets - Set 1 & 2		Brackets - Set 3 & 4	
		A Distance from Wall (mm)	B Connection Distance from Wall (mm)	C Distance from Wall (mm)	D Connection Distance from Wall (mm)
2 Column	63	31 / 41	63 / 73	30 - 50	62 - 82
3 Column	101	31 / 41	82 / 92	30 - 50	81 - 101
4 Column	139	31 / 41	101 / 111	30 - 50	100 - 120
5 Column	177	31 / 41	120 / 130	30 - 50	119 - 139
6 Column	215	31 / 41	139 / 149	30 - 50	138 - 158

Fixing dimensions for different connection options

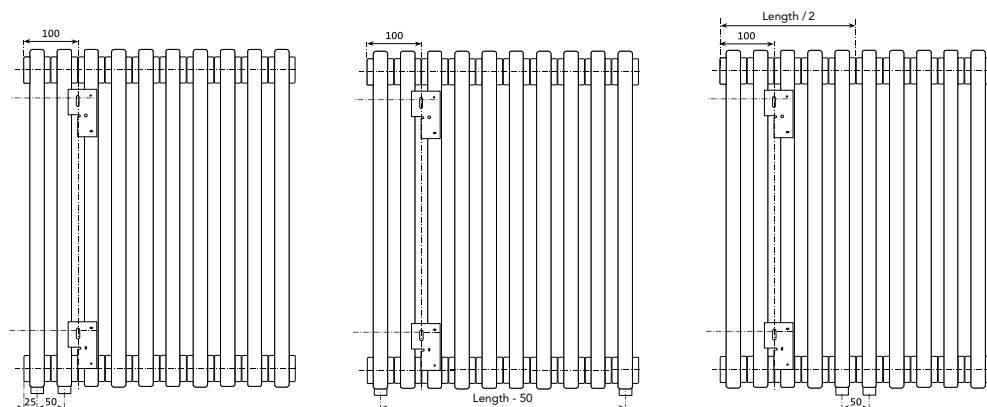

The two outer fixing axes should be installed between the second and third sections. Each additional fixing axis should be installed as symmetrically as possible.

Fixing Details

Mounting Positions, Dimensions & Wall Brackets (cont...)

When ordering a Multicolumn Plus radiator, it will come with the standard fixing set which includes Angled Brackets (RW) and Radiator Holders (RH2). The set includes the correct number of Angled Brackets, Radiator Holders, the necessary screws and plugs (check suitability with the wall) as well as the installation instructions.

We recommend the top Radiator Holder (RH2) is fitted directly under the upper horizontal waterway, as shown in the sections on page 23.

Optional accessories include a Drill Bracket (RA), Free Standing Floor Brackets (SK2+FK5) and wall brackets of various types and sizes for fixing together with the Radiator Holders (RH2). With a special Adjustable Wall Bracket (RV), the radiator can be installed in a wide variety of distances from the wall.

It is important to use the right number of fixing brackets for each radiator (see fixing points table below).

Each top bracket has a recommended position of directly under the upper horizontal waterway, with the lower bracket position directly below (see page 23) this will give you a vertical fixing axis.

In public areas (for example schools) subject to unusually heavy loads, we recommend wall bracket WKS.

Free standing floor brackets are also available: Floor Bracket (SK2) can be installed to a maximum radiator height of 1000mm and Floor Bracket (FK5) up to 500mm. For every vertical fixing axis, we recommend one Free Standing Bracket/Floor Bracket.

The load bearing capability of the wall must be checked against the weight of the radiator.






Fixing Points

2 Columns - Height (mm)													
Fixing Points	Number of Sections	up to 750	900	1000	1100	1200	1500	1800	2000	2200	2500	2800	3000
4		4 - 20	4 - 20	4 - 20	4 - 20	4 - 20	4 - 20	4 - 20	4 - 19	4 - 18	4 - 16	4 - 14	4 - 13
6		21 - 36	21 - 36	21 - 36	21 - 36	21 - 36	21 - 36	21 - 33	20 - 29	19 - 27	17 - 24	15 - 21	14 - 20
8		37 - 52	37 - 52	37 - 52	37 - 52	37 - 52	37 - 52	34 - 44	30 - 39	28 - 36	25 - 32	22 - 28	21 - 26
10		53 - 68	53 - 68	53 - 68	53 - 68	53 - 68	53 - 65	45 - 55	40 - 49	37 - 45	33 - 40	29 - 35	27 - 33
12		69 - 80	69 - 80	69 - 80	69 - 80	69 - 80	66 - 78	56 - 66	50 - 60	46 - 55	41 - 48	36 - 44	34 - 40
3 Columns - Height (mm)													
Fixing Points	Number of Sections	up to 750	900	1000	1100	1200	1500	1800	2000	2200	2500	2800	3000
4		4 - 20	4 - 20	4 - 20	4 - 20	4 - 20	4 - 17	4 - 15	4 - 13	4 - 12	4 - 10	4 - 9	4 - 9
6		21 - 36	21 - 36	21 - 36	21 - 35	21 - 33	18 - 26	16 - 22	14 - 20	13 - 18	11 - 16	10 - 14	10 - 13
8		37 - 52	37 - 52	37 - 52	36 - 47	34 - 44	27 - 35	23 - 30	21 - 27	19 - 24	17 - 21	15 - 19	14 - 18
10		53 - 68	53 - 68	53 - 65	48 - 59	45 - 55	36 - 44	31 - 37	28 - 33	25 - 30	22 - 27	20 - 24	19 - 22
12		69 - 80	69 - 80	66 - 78	60 - 72	56 - 66	45 - 54	38 - 45	34 - 41	31 - 38	28 - 33	25 - 30	23 - 28
4 Columns - Height (mm)													
Fixing Points	Number of Sections	up to 750	900	1000	1100	1200	1500	1800	2000	2200	2500	2800	3000
4		4 - 20	4 - 20	4 - 20	4 - 18	4 - 16	4 - 13	4 - 11	4 - 10	4 - 9	4 - 8	4 - 7	4 - 6
6		21 - 36	21 - 32	20 - 29	19 - 27	17 - 24	14 - 20	12 - 17	11 - 15	10 - 14	9 - 12	8 - 11	7 - 10
8		37 - 51	33 - 43	30 - 39	28 - 36	25 - 33	21 - 26	18 - 22	16 - 20	15 - 18	13 - 16	12 - 14	11 - 13
10		52 - 64	44 - 54	40 - 49	37 - 45	34 - 41	27 - 33	23 - 28	21 - 25	19 - 23	17 - 20	15 - 18	14 - 17
12		65 - 77	55 - 66	50 - 59	46 - 54	42 - 48	34 - 41	29 - 34	26 - 31	24 - 28	21 - 25	19 - 23	18 - 21
5 Columns - Height (mm)													
Fixing Points	Number of Sections	up to 750	900	1000	1100	1200	1500	1800	2000	2200	2500	2800	3000
4		4 - 14	4 - 14	4 - 14	4 - 14	4 - 13	4 - 10	4 - 9	4 - 8	4 - 7	4 - 6	4 - 5	4 - 5
6		15 - 24	15 - 24	15 - 23	15 - 21	14 - 20	11 - 16	10 - 13	9 - 12	8 - 11	7 - 10	6 - 8	6 - 8
8		25 - 34	25 - 34	24 - 31	22 - 29	21 - 26	17 - 21	14 - 18	13 - 16	12 - 15	11 - 13	9 - 11	9 - 11
10		35 - 44	35 - 43	32 - 39	30 - 36	27 - 33	22 - 27	19 - 22	17 - 20	16 - 18	14 - 16	12 - 14	12 - 13
12		45 - 54	44 - 50	40 - 48	37 - 44	34 - 40	28 - 33	23 - 28	21 - 25	19 - 23	17 - 21	15 - 19	14 - 17
6 Columns - Height (mm)													
Fixing Points	Number of Sections	up to 750	900	1000	1100	1200	1500	1800	2000	2200	2500	2800	3000
4		4 - 14	4 - 14	4 - 13	4 - 12	4 - 11	4 - 9	4 - 7	4 - 7	4 - 6	4 - 5	4 - 5	4
6		15 - 24	15 - 21	14 - 19	13 - 18	12 - 16	10 - 13	8 - 11	8 - 10	7 - 9	6 - 8	6 - 7	5 - 7
8		25 - 34	22 - 29	20 - 26	19 - 24	17 - 22	14 - 18	12 - 15	11 - 13	10 - 12	9 - 11	8 - 10	8 - 9
10		35 - 43	30 - 36	27 - 33	25 - 30	23 - 28	19 - 22	16 - 19	14 - 17	13 - 15	12 - 13	11 - 12	10 - 11
12		44 - 52	37 - 44	34 - 40	31 - 36	29 - 34	23 - 28	20 - 24	18 - 21	16 - 19	14 - 17	13 - 15	12 - 13

Note: For heights not given in the table, the number of fixing points is determined by the next height up.

Mounting Details





Wall Mounting Options

Product	Product Code
 Bracket Set 1 - with Angled Brackets Consists of 4 painted radiator brackets and angle brackets (RH2 & RW) with rubber inlay, screws, plugs, air vent and installation instructions. White - RAL 9016 Special colour - any RAL Bracket Set 2 - with Angled Brackets Consists of 6 painted radiator brackets and angle brackets (RH2 & RW) with rubber inlay, screws, plugs, air vent and installation instructions. White - RAL 9016 Special colour - any RAL	AZ13DZ9522231000 AZ13DZ952233100...* AZ13DZ9522232000 AZ13DZ952233200...*
 Angled Bracket RW Including rubber inlay. White - RAL 9016 Special colour - any RAL	AZ13DZ9501510000 AZ13DZ950151100...*
 Radiator Holder RH2 For use with the above wall brackets (RW), height and side adjustable. Radiator holders are to be mounted at the top and bottom on the rear side of the radiator. White - RAL 9016 Special colour - any RAL	AZ13DZ9501310000 AZ13DZ950131100...*
 Bracket Set 3 - with Drill Brackets Consists of 4 painted radiator holders (RH2) and 4 drill brackets RA length 160mm complete with screws, plugs and installation instructions. White - RAL 9016 Special colour - any RAL Bracket Set 4 - with Drill Brackets Consists of 6 painted radiator holders (RH2) and 6 drill brackets RA length 160mm complete with screws, plugs and installation instructions. White - RAL 9016 Special colour - any RAL	AZ13DZ9522233000 AZ13DZ952233300...* AZ13DZ9522234000 AZ13DZ952233400...*
 Drill Bracket RA Expansion anchor with double wedge for installation in the wall, galvanized, sound insulated, recommended drilling diameter = 18mm. Length 100mm Length 130mm Length 160mm Length 200mm	AZ13DZ9501401000 AZ13DZ9501402000 AZ13DZ9501403000 AZ13DZ9501404000
 Wall Bracket RK1 & 2 For use with the radiator holder RH2 which can be easily adjusted. For wall distances from 35 to 42mm (RK1), White - RAL 9016 as above, Special colour - any RAL For wall distances 42 to 58mm (RK2), White - RAL 9016 as above, Special colour - any RAL	AZ13DZ9501557000 AZ13DZ950155500...* AZ13DZ9501558000 AZ13DZ950155600...*

*Please add your chosen 4 digit RAL colour reference at the end of the product code.

Mounting Details

Wall Mounting Options (cont...)

Product	Product Code
 Spacer AH2 Keeps distance from the wall for wall mounting, accepts no load-bearing function, adjustable wall distance of 35 to 50mm, clamping part of wall plate is transparent plastic.	AZ13DZ9501604000
 Regulating Wall Bracket RV Adjustable wall distance; recommended models in bold. RV1: length 70-92mm: For 2 Column (wall distance 39-60mm) and 3 Column (wall distance 20-41mm), White - RAL 9016 as above, Special colour - any RAL RV2: length 90-140mm: For 2 Column (wall distance 59-108mm), 3 Column (wall distance 40-89mm), 4 Column (wall distance 21-70mm) and 5 Column (wall distance 15-51mm), White - RAL 9016 as above, Special colour - any RAL RV3: length 130-210mm: For 4 Column (wall distance 61-140mm), 5 Column (wall distance 42-121mm) and 6 Column (wall distance 23-102mm), White - RAL 9016 as above, Special colour - any RAL	AZ13DZ9521634000 AZ13DZ952153700...* AZ13DZ9521635000 AZ13DZ952153800...* AZ13DZ9521636000 AZ13DZ952153900...*
 Wall Bracket WKS for radiators heavier than 250kgs For bolting to the wall, robust design, wall distance 40mm, combined with regulating RV wall bracket. White - RAL 9016 as above, Special colour - any RAL	AZ13DZ9521640000 AZ13DZ952164200...*
 WSV Wall Rail for heavy applications For heights 300-495mm; White - RAL 9016 For heights 300-495mm; Special colour - any RAL For heights 500-695mm; White - RAL 9016 For heights 500-695mm; Special colour - any RAL For heights 700-3000mm, 2 piece; White - RAL 9016 For heights 700-3000mm, 2 piece; Special colour - any RAL	AZ13DZ9521711000 AZ13DZ952172100...* AZ13DZ9521712000 AZ13DZ952172200...* AZ13DZ9521713000 AZ13DZ952172300...*



*Please add your chosen 4 digit RAL colour reference at the end of the product code.

Mounting Details

Floor Mounting Options

Product	Product Code
Floor Bracket SK2 Complete system for free-standing radiators, from 2-6 column up to 1000mm high. Finished in the colour of your choice. Comprises; 3mm thick base-plate for fixing to either finished or unfinished floor. Upright support 35 x 10 x 1.5mm, fixing set with adjustable bracket, security fixing, anti-vibration insert. Adjustable bottom support with spacer and security fixing, anti-vibration insert, white plastic end stop for top of upright. For radiator height 300mm (H = 460mm), White - RAL 9016 For radiator height 300mm (H = 460mm), Special colour - any RAL For radiator height 350mm (H = 510mm), White - RAL 9016 For radiator height 350mm (H = 510mm), Special colour - any RAL For radiator height 400mm (H = 560mm), White - RAL 9016 For radiator height 400mm (H = 560mm), Special colour - any RAL For radiator height 450mm (H = 610mm), White - RAL 9016 For radiator height 450mm (H = 610mm), Special colour - any RAL For radiator height 500mm (H = 660mm), White - RAL 9016 For radiator height 500mm (H = 660mm), Special colour - any RAL For radiator height 550mm (H = 710mm), White - RAL 9016 For radiator height 550mm (H = 710mm), Special colour - any RAL For radiator height 600mm (H = 760mm), White - RAL 9016 For radiator height 600mm (H = 760mm), Special colour - any RAL For radiator height 750mm (H = 910mm), White - RAL 9016 For radiator height 750mm (H = 910mm), Special colour - any RAL For radiator height 900mm (H = 1060mm), White - RAL 9016 For radiator height 900mm (H = 1060mm), Special colour - any RAL For radiator height 1000mm (H = 1160mm), White - RAL 9016 For radiator height 1000mm (H = 1160mm), Special colour - any RAL Note: For radiator heights not shown, select the next height up Floor Bracket SK2 and modify overall height during installation.	AZ13DZ9522404600 AZ13DZ952250460...* AZ13DZ9522405100 AZ13DZ952250510...* AZ13DZ9522405600 AZ13DZ952250560...* AZ13DZ9522406100 AZ13DZ952250610...* AZ13DZ9522406600 AZ13DZ952250660...* AZ13DZ9522407100 AZ13DZ952250710...* AZ13DZ9522407600 AZ13DZ952250760...* AZ13DZ9522409100 AZ13DZ952250910...* AZ13DZ9522410600 AZ13DZ952251060...* AZ13DZ9522411600 AZ13DZ952251160...*
Clamped Floor Bracket FK5 Complete system for free-standing radiators, from 2-6 column up to 500mm high. Finished in the colour of your choice. Comprises. 3mm thick base-plate for fixing to either finished or unfinished floor, upright support, plate and bearing retainer. Adjustable 80-110mm, White - RAL 9016 Adjustable 80-110mm, Special colour - any RAL Adjustable 110-170mm, White - RAL 9016 Adjustable 110-170mm, Special colour - any RAL Adjustable 170-290mm, White - RAL 9016 Adjustable 170-290mm, Special colour - any RAL	AZ13DZ9522724000 AZ13DZ952272700...* AZ13DZ9522725000 AZ13DZ952272800...* AZ13DZ9522723000 AZ13DZ952272600...*
Foot Plate Cover for floor bracket SK2 and clamped floor bracket FK5 For finished floor mounting, white plastic.	AZ13DZ9522401000


Accessories

Product	Product Code
 Radiator Nipple 1" Nipple Seal 1"	AZ13DZ8820230000 AZ13DZ8820210000
 Nipple Tool 1000mm length, 1", for blocks with up to 19 sections 1600mm length, 1", for blocks with up to 30 sections 2200mm length, 1", for blocks with up to 40 sections Applicable for iron nipple rod	AZ13DZ8810313000 AZ13DZ8810314000 AZ13DZ8810315000 AZ13DZ8810309000
 Adapter 3/4" Male to 1" Female for 1" pipe connection 27mm	AZ13DZ8820160000
 Stopper Sets Plug Set 1/2": blanking plug and white vent plug 1/2" with plug seal Plug Set 3/4": blanking plug and white vent plug 3/4" with plug seal	AZ13DZ8810120000 AZ13DZ8810110000
 Plug 1/2" Nickel-Plated Recommended for radiators in Special colours. Designer ventilation plug 1/2", nickel-plated Blanking plug 1/2", nickel-plated	AZ13DZ8810202000 AZ13DZ8810106000
 Plugs Vent plug 3/4" Blanking plug 3/4" Reducing plug 3/4" to 1/2" Reducing plug 3/4" to 3/8" Reducing plug 1/2" to 3/8"	AZ13DZ8810215000 AZ13DZ8810212000 AZ13DZ8810213000 AZ13DZ8810214000 AZ0PL000R0001000
 Towel Rail Towel rail 30 x 10mm, with 2 chrome holders, depth 45mm (Only available for radiators between 6 to 20 sections). White - RAL 9016 Special colour - any RAL **Please specify number of sections in product code where indicated. i.e "06" for 6 sections (300mm) or "12" for 12 sections (600mm)	AZ13DZ812125**00 AZ13DZ812115**0....*



Connection Options

Connection Ladder

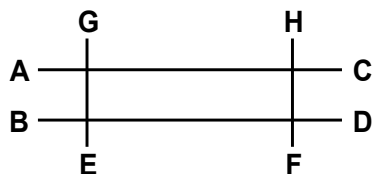



CONNECTION SIZES
AVAILABLE:

1/2" (Standard)

3/4" (Optional)

- | = Diverter
- = Flow (in)
- ← = Return (out)
- AV = Air Vent

For EF/FE Connection

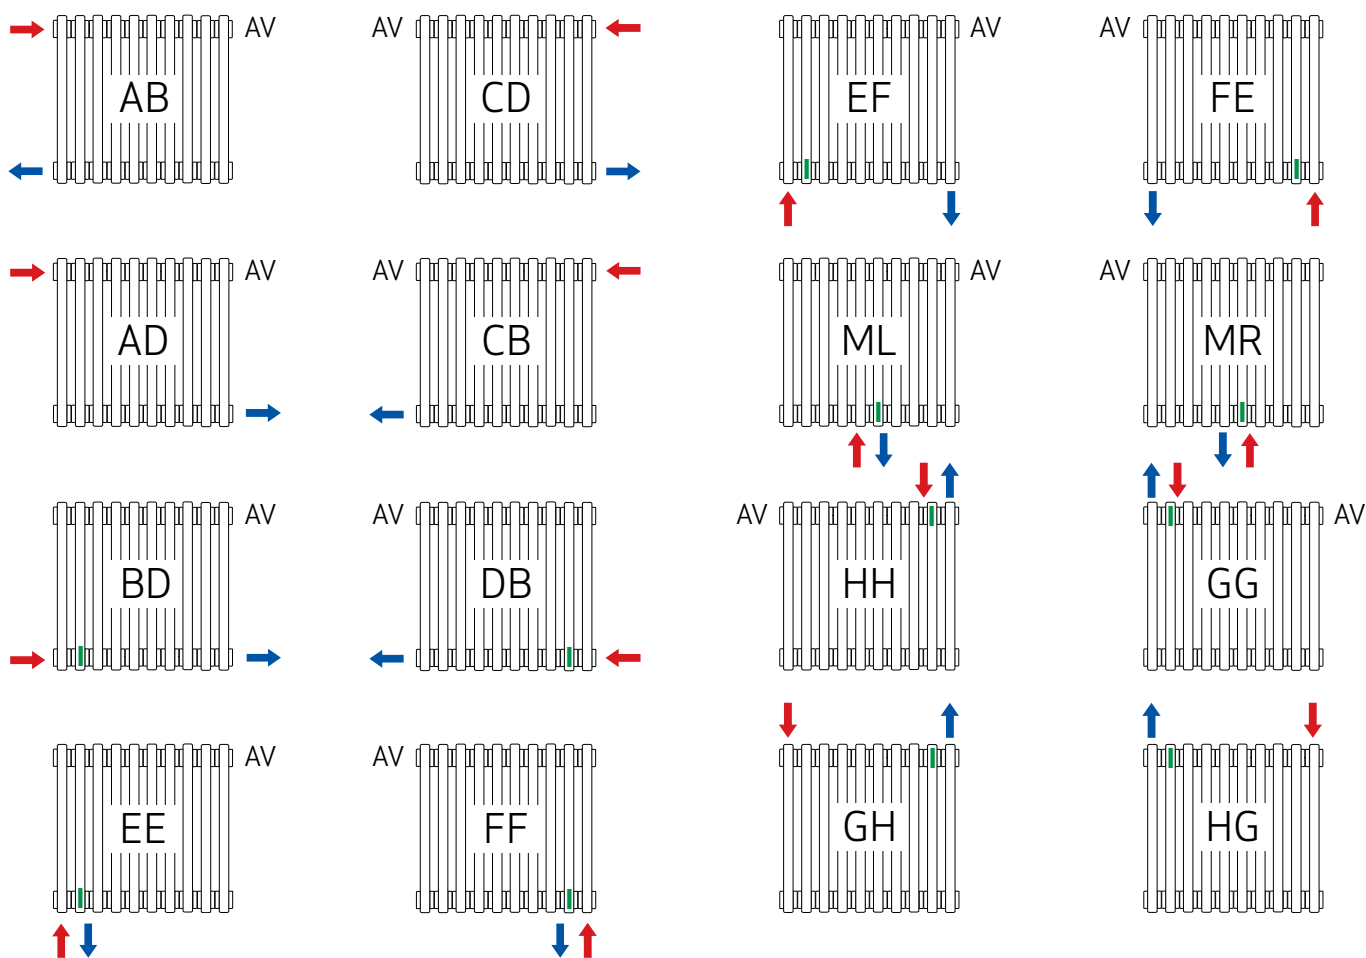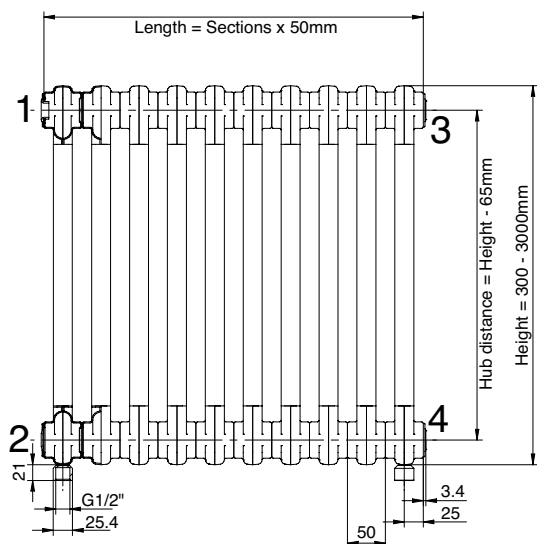

Note: Flow and return position must be specified at point of order.

Correction Factors

How to calculate a corrected output

- Calculate the Delta T including air temperature - example:
 Mean Water Temperature (MWT) = $(^{\circ}\text{C Flow} + ^{\circ}\text{C Return}) / 2 = (65 + 55) / 2 = 60^{\circ}\text{C}$
 Required Air Temperature = 21°C
 Delta T (ΔT) = Mean Water Temperature - Required Air Temperature = $60 - 21 = 39^{\circ}\text{C}$
- Note the Delta T 50 output shown for the specific size you require.
- Locate the Exponent ('n') for the product you have selected within the Correction Factor table and your calculated Delta T (ΔT).
- Multiply the Delta T 50 output noted, by the correction factor shown.

Outputs stated within this catalogue are shown at $\Delta T 50^{\circ}\text{C}$ and also calculated at $\Delta T 30^{\circ}\text{C}$.

Multiplying factors required to calculate outputs at different Delta Ts (ΔT s) between 15°C and 60°C are shown in the Correction Factor table below.

EXAMPLE:

Radiator Selected: 3 Column,
600mm (Height) x 1000mm (Length)

Delta T of System (ΔT): 39°C

Exponent ('n'): 1.26

Output @ Delta T50: 1302 (w)

Corrected Output =

$1302 \text{ (w)} \times 0.7312 \text{ (Correction Factor)} = 952 \text{ (w) at } \Delta T 39$

Exponent 'n'		1.26	
Height (mm)		600	
Sections	Length (mm)	$\Delta T 50$	$\Delta T 30$
19	950	1237	644
20	1000	1302	678
21	1050	1367	712

Product example: 3 Column, extracted from page 12.

ΔT	Exponent 'n'														
	1.21	1.22	1.23	1.24	1.25	1.26	1.27	1.28	1.29	1.3	1.31	1.32	1.33	1.34	1.35
60	1.2468	1.2491	1.2514	1.2537	1.256	1.2583	1.2606	1.2629	1.2652	1.2675	1.2698	1.2721	1.2744	1.2767	1.2791
59	1.2217	1.2238	1.2258	1.2278	1.2299	1.2319	1.2339	1.236	1.238	1.2401	1.2421	1.2442	1.2462	1.2483	1.2504
58	1.1967	1.1985	1.2003	1.2021	1.2039	1.2056	1.2074	1.2092	1.211	1.2128	1.2146	1.2164	1.2182	1.22	1.2219
57	1.1718	1.1733	1.1749	1.1764	1.178	1.1795	1.1811	1.1826	1.1842	1.1857	1.1873	1.1888	1.1904	1.1919	1.1935
56	1.147	1.1483	1.1496	1.1509	1.1522	1.1535	1.1548	1.1561	1.1574	1.1587	1.16	1.1614	1.1627	1.164	1.1653
55	1.1222	1.1233	1.1244	1.1255	1.1265	1.1276	1.1287	1.1298	1.1308	1.1319	1.133	1.1341	1.1351	1.1362	1.1373
54	1.0976	1.0984	1.0993	1.1001	1.101	1.1018	1.1027	1.1035	1.1044	1.1052	1.1061	1.1069	1.1078	1.1086	1.1095
53	1.0731	1.0737	1.0743	1.0749	1.0756	1.0762	1.0768	1.0774	1.0781	1.0787	1.0793	1.08	1.0806	1.0812	1.0818
52	1.0486	1.049	1.0494	1.0498	1.0502	1.0507	1.0511	1.0515	1.0519	1.0523	1.0527	1.0531	1.0535	1.054	1.0544
51	1.0243	1.0245	1.0247	1.0249	1.0251	1.0253	1.0255	1.0257	1.0259	1.0261	1.0263	1.0265	1.0267	1.0269	1.0271
50	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
49	0.9759	0.9757	0.9755	0.9753	0.9751	0.9749	0.9747	0.9745	0.9743	0.9741	0.9739	0.9737	0.9735	0.9733	0.9731
48	0.9518	0.9514	0.951	0.9506	0.9503	0.9499	0.9495	0.9491	0.9487	0.9483	0.9479	0.9475	0.9472	0.9468	0.9464
47	0.9279	0.9273	0.9267	0.9261	0.9256	0.925	0.9244	0.9239	0.9233	0.9227	0.9221	0.9216	0.921	0.9204	0.9199
46	0.904	0.9033	0.9025	0.9018	0.901	0.9003	0.8995	0.8988	0.898	0.8973	0.8965	0.8958	0.895	0.8943	0.8935
45	0.8803	0.8794	0.8785	0.8775	0.8766	0.8757	0.8748	0.8738	0.8729	0.872	0.8711	0.8702	0.8692	0.8683	0.8674
44	0.8567	0.8556	0.8545	0.8534	0.8523	0.8512	0.8501	0.8491	0.848	0.8469	0.8458	0.8447	0.8436	0.8426	0.8415
43	0.8332	0.8319	0.8307	0.8294	0.8282	0.8269	0.8257	0.8244	0.8232	0.822	0.8207	0.8195	0.8182	0.817	0.8158
42	0.8098	0.8084	0.807	0.8056	0.8042	0.8028	0.8014	0.8	0.7986	0.7972	0.7958	0.7944	0.793	0.7917	0.7903
41	0.7865	0.785	0.7834	0.7819	0.7803	0.7788	0.7772	0.7757	0.7741	0.7726	0.7711	0.7695	0.768	0.7665	0.765
40	0.7634	0.7617	0.76	0.7583	0.7566	0.7549	0.7532	0.7515	0.7499	0.7482	0.7465	0.7449	0.7432	0.7416	0.7399
39	0.7403	0.7385	0.7367	0.7348	0.733	0.7312	0.7294	0.7276	0.7258	0.724	0.7222	0.7204	0.7186	0.7168	0.715
38	0.7174	0.7155	0.7135	0.7116	0.7096	0.7077	0.7057	0.7038	0.7019	0.6999	0.698	0.6961	0.6942	0.6923	0.6904
37	0.6947	0.6926	0.6905	0.6884	0.6863	0.6843	0.6822	0.6802	0.6781	0.6761	0.6741	0.672	0.67	0.668	0.666
36	0.672	0.6698	0.6676	0.6654	0.6632	0.6611	0.6589	0.6567	0.6546	0.6524	0.6503	0.6482	0.646	0.6439	0.6418
35	0.6495	0.6472	0.6449	0.6426	0.6403	0.638	0.6357	0.6335	0.6312	0.629	0.6267	0.6245	0.6223	0.6201	0.6178
34	0.6271	0.6247	0.6223	0.6199	0.6175	0.6151	0.6128	0.6104	0.608	0.6057	0.6034	0.6011	0.5987	0.5964	0.5941
33	0.6049	0.6023	0.5998	0.5974	0.5949	0.5924	0.59	0.5875	0.5851	0.5826	0.5802	0.5778	0.5754	0.573	0.5707
32	0.5827	0.5801	0.5776	0.575	0.5724	0.5699	0.5673	0.5648	0.5623	0.5598	0.5573	0.5548	0.5524	0.5499	0.5474
31	0.5608	0.5581	0.5554	0.5528	0.5502	0.5475	0.5449	0.5423	0.5397	0.5372	0.5346	0.5321	0.5295	0.527	0.5245
30	0.539	0.5362	0.5335	0.5308	0.5281	0.5254	0.5227	0.52	0.5174	0.5148	0.5121	0.5095	0.5069	0.5043	0.5018
29	0.5173	0.5145	0.5117	0.5089	0.5062	0.5034	0.5007	0.498	0.4952	0.4926	0.4899	0.4872	0.4846	0.4819	0.4793
28	0.4958	0.4929	0.4901	0.4873	0.4844	0.4816	0.4788	0.4761	0.4733	0.4706	0.4679	0.4652	0.4625	0.4598	0.4571
27	0.4745	0.4715	0.4686	0.4658	0.4629	0.4601	0.4572	0.4544	0.4516	0.4489	0.4461	0.4434	0.4406	0.4379	0.4352
26	0.4533	0.4503	0.4474	0.4445	0.4416	0.4387	0.4358	0.433	0.4302	0.4274	0.4246	0.4218	0.4191	0.4163	0.4136
25	0.4323	0.4293	0.4263	0.4234	0.4204	0.4175	0.4147	0.4118	0.409	0.4061	0.4033	0.4005	0.3978	0.395	0.3923
24	0.4114	0.4084	0.4054	0.4025	0.3995	0.3966	0.3937	0.3908	0.388	0.3851	0.3823	0.3795	0.3767	0.374	0.3713
23	0.3908	0.3878	0.3848	0.3818	0.3788	0.3759	0.373	0.3701	0.3672	0.3644	0.3616	0.3588	0.356	0.3533	0.3505
22	0.3703	0.3673	0.3643	0.3613	0.3584	0.3554	0.3525	0.3496	0.3468	0.3439	0.3411	0.3383	0.3356	0.3328	0.3301
21	0.3501	0.347	0.344	0.3411	0.3381	0.3352	0.3323	0.3294	0.3266	0.3238	0.321	0.3182	0.3154	0.3127	0.31
20	0.33	0.327	0.324	0.321	0.3181	0.3152	0.3123	0.3095	0.3067	0.3039	0.3011	0.2983	0.2956	0.2929	0.2903
19	0.3101	0.3071	0.3042	0.3013	0.2984	0.2955	0.2926	0.2898	0.287	0.2843	0.2815	0.2788	0.2761	0.2735	0.2708
18	0.2905	0.2875	0.2846	0.2817	0.2789	0.276	0.2732	0.2704	0.2677	0.265	0.2623	0.2596	0.257	0.2544	0.2518
17	0.2711	0.2682	0.2653	0.2624	0.2596	0.2568	0.2541	0.2514	0.2487	0.246	0.2434	0.2407	0.2382	0.2356	0.2331
16	0.2519	0.249	0.2462	0.2434	0.2407	0.238	0.2353	0.2326	0.23	0.2274	0.2248	0.2222	0.2197	0.2172	0.2148
15	0.233	0.2302	0.2274	0.2247	0.222	0.2194	0.2167	0.2141	0.2116	0.2091	0.2066	0.2041	0.2016	0.1992	0.1968

Multicolumn Plus Bar

The Multicolumn Plus Bar radiator ingeniously integrates the heating function with that of furniture, suitable for the requirements of the building occupant.

Designed by renowned architects, the Multicolumn Plus Bar provides elegance and functionality, which at the same time, is enchanting and one of a kind.

The Multicolumn Plus Bar is an upper class decorative radiator, which can serve as a worktop, and at the same time create space dividers. The worktop's upper board is made of beech wood and constitutes an additional decorative detail in carefully designed high quality rooms. The ingenious solution of externally invisible hydronic heating system connections additionally increases high aesthetic qualities of the radiator.

Superior paint finish quality in a range of RAL colours enriches available options. Flexibility in height and length selection facilitate perfect integration with desired room decor.



THE MULTICOLUMN PLUS BAR:

> Decorative radiator, totally laser-welded. Flattened cross section of the external D-profiled columns for maximum heat output

> Height: 940 (750)*, 1090 (900)* mm

> Length: 720 (700)*, 920 (900)*, 1120 (1100)* mm

> Depth: 4-columned - 224mm; 5-columned - 262mm

COLOUR:

As standard RAL 9016, other RAL colours at request; possibility to order radiator in a different RAL colour than decorative frame.

PACKAGING:

Packed for transport in environment friendly, edge-protecting packaging, welded in foil.

CONNECTIONS:

Bottom left of the casing is the supply location, bottom right is the return, internal thread G 1/2". Factory equipped with the valve insert with initial preset together with the thermostatic valve with connecting thread M30x1.5mm, from the top left-hand side; air vent G 1/2" from the top right-hand side.

TESTING:

Multicolumn Plus Bar radiators are tested at 13 Bar giving a maximum operating pressure of 10 Bar.

Maximum operating temperature is 110°C.

BRACKETS:

Decorative set for the on-floor mounting and radiator's connections masking, with possibility to mount the top board on the Client's site.


DELIVERY RANGE:

Delivery with floor stands and decorative set, no top board; plugs and bolts for floor stands mounting and top board mounting are not included.


*Dimensions exclude top board. Radiator dimension shown in brackets.



FRONT VIEW

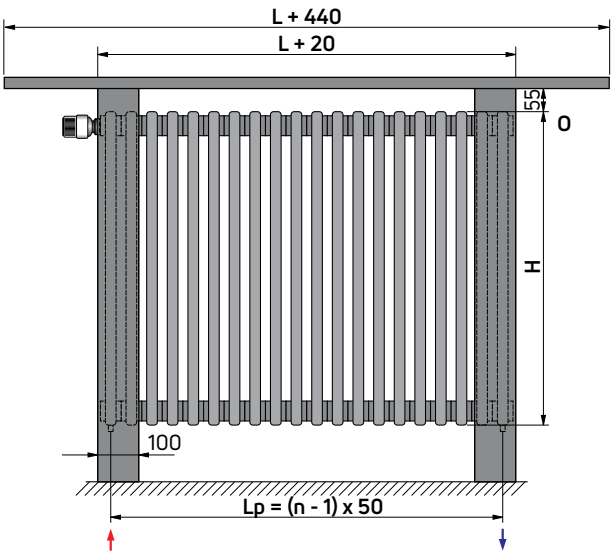

SIDE VIEW

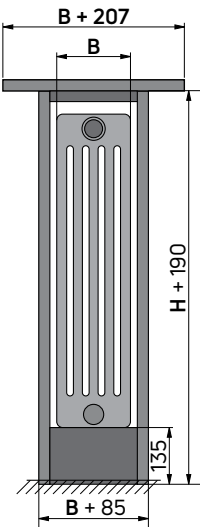

- H - height
- L - length
- B - depth
- Lp - connectors' spacing
- n - number of sections
- o - air vent

Exponent 'n'		1.30		1.30		1.31		1.31	
Height (mm)		750				900			
Number of Columns		4		5		4		5	
Depth (mm)		139		177		139		177	
Sections	Length (mm)	Output (Watts)							
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
14	700	1416	729	1747	900	1665	851	2005	1050
18	900	1821	938	2246	1157	2141	1094	2642	1350
22	1100	2225	1146	2746	1414	2616	1337	3229	1651
		Weight (kg)							
14	700	50		58		58		68	
18	900	59		70		69		82	
22	1100	69		82		81		97	
		Capacity (l)							
14	700	21.2		26.1		24.7		30.4	
18	900	27.2		33.5		31.7		39.1	
22	1100	33.3		41		38.8		47.8	

Multicolumn Plus Bench


Multicolumn Plus Bench radiators ingeniously integrate the heating function with that of a sitting bench, suitable for the requirements of the building occupant.

While other Multicolumn Plus radiators discreetly perform their function, this radiator literally catch everyone's eye! Designed by renowned architects, the Multicolumn Plus Bench delivers practicality and functionality.

The top board is made of beech wood and constitutes an additional decorative detail. The ingenious solution of externally invisible connecting pipework additionally increases the high aesthetic qualities of the radiator.

All other qualities of the Multicolumn Plus radiator range are naturally featured in the Multicolumn Plus Bench series, which signifies that whatever your internal arrangement is – you will certainly find a matching solution in our offer.

Superior paint finish quality in a range of RAL colours enriches available options.

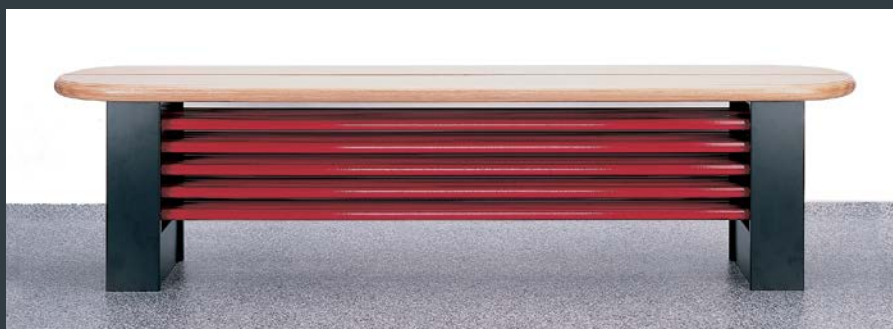

THE MULTICOLUMN PLUS BENCH:

- Decorative radiator, totally laser-welded. Flattened cross section of the external profiled columns for maximum heat output
- 4 up to 7 sections, 6 columns, horizontally positioned one on top of another
- Height: 387 (200)*, 437 (250)*, 487 (300)*, 537 (350)* mm
- Length: 1535 (1500)* up to 2835 (2800)* mm
- Depth: 300mm

COLOUR:

As standard snow-white RAL 9016, other RAL colours available on request; possibility to order radiator in a different RAL colour than decorative covers.

PACKAGING:

Packed for transport in environmental friendly, edge-protecting packaging, welded in foil.

CONNECTIONS:

Bottom left of the casing is the supply location, bottom right is the return, internal thread G 1/2". The Multicolumn Plus Bench with the thermostatic valve with pre-setting together with the thermostatic head with connection thread M30x1.5mm, from the bottom left-hand side; air vent G 1/2" from the top right-hand side.

TESTING:

Multicolumn Plus Bench radiators are tested at 13 Bar giving a maximum operating pressure of 10 Bar. Maximum operating temperature is 110°C.

BRACKETS:

Decorative set for the on-floor mounting and radiator's connections masking, with possibility to mount the top board on the Client's site.


DELIVERY RANGE:

2 element's floor consoles set (3 floor consoles for the radiator lengths exceeding 2000mm) and decorative set, no top board (delivery at Client's request).


*Dimensions exclude top board.
Radiator dimension shown in brackets.




FRONT VIEW

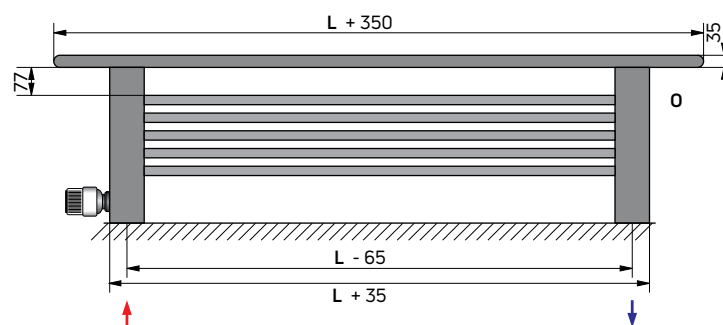

SIDE VIEW



BOTTOM VIEW



H - height
L - length
B - depth
n - number of sections
o - air vent

Length (mm)		1500		1800		2000		2500		2800	
Number of Columns		6		6		6		6		6	
Depth (mm)		215		215		215		215		215	
Sections	Height (mm)	Output (Watts)									
		ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30	ΔT50	ΔT30
4	200	1411	721	1696	868	1886	968	2362	1217	2648	1368
5	250	1742	908	2097	1091	2334	1214	2929	1518	3287	1701
6	300	1934	1002	2337	1212	2606	1353	3285	1708	3695	1923
7	350	2204	1142	2670	1379	2982	1536	3770	1929	4247	2164
		Exponent 'n'									
4	200	1.32		1.31		1.31		1.30		1.29	
5	250	1.28		1.28		1.28		1.29		1.29	
6	300	1.29		1.28		1.28		1.28		1.28	
7	350	1.29		1.29		1.30		1.31		1.32	
		Weight (kg)									
4	200	37.5		42.8		46.4		55.3		64.2	
5	250	45.2		51.9		56.4		67.5		78.6	
6	300	52.9		60.9		66.3		79.6		93	
7	350	60.6		70		76.3		91.8		107.4	
		Capacity (l)									
4	200	16.4		19.3		21.3		26.2		29.2	
5	250	20.4		24.1		26.6		32.8		36.5	
6	300	24.5		29		31.9		39.3		43.8	
7	350	28.6		33.8		37.2		45.9		51.1	

Merriott UK & Ireland

Purmo Group (UK) Ltd, Eastern Avenue, Team Valley,
Gateshead, Tyne & Wear NE11 0PG
Tel: 0330 0415 472

sales@merriottuk.com
sales@merriott.ie

www.merriottuk.com / www.merriott.ie

Follow us on  @MerriottUK and 