


Mounting Details

Horizontal models


MOUNTING POSITIONS, DIMENSIONS AND WALL BRACKETS

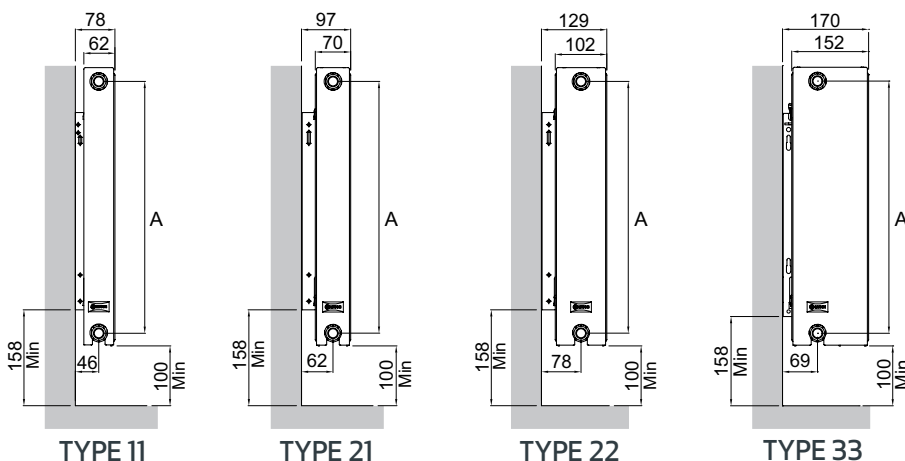

Nominal Height (mm)	A (mm)
300	250
400	350
500	450
600	550
750	700
900	850


WALL BRACKETS

Supplied with Type 11, 21, 22



Type 11 only Type 21 & 22

Supplied with Type 33




Fixing Hole Dimensions Type 33

Nominal Height (mm)	B (mm)
300	142
400	242
500	342
600	442
750	591
900	742

*Use dimension B+9 for 300mm high Type 33

FLOOR BRACKETS FOR ALL TYPES:




Radiator to wall distance: Any
Maximum load of a single bracket:
Vertically - 180kg
Pulling - 35kg
Order Code: MERRPANELFOOT
(single piece)


Height 300 - 750mm	
Radiator length (mm)	Quantity of floor brackets*
400 - 1600	2
1800 - 2300	3
2400 - 2600	4

*The floor brackets will support the radiators, however, in certain instances the brackets will flex and where possible the radiator should be fixed to the wall using the top bracket.


BRACKET POSITIONS AND DIMENSIONS

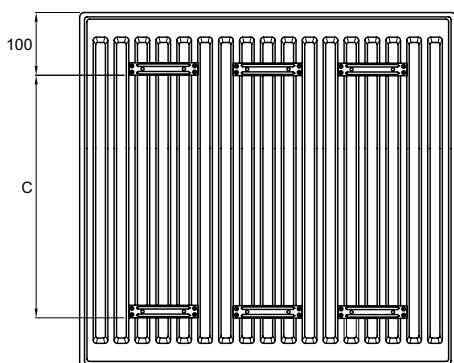

TYPE 11



TYPE 21, 22 & 33




Nominal Height (mm)	C (mm)
300	120
400	220
500	320
600	420
750	570
900	720


Mounting Details

Vertical models

FRONT VIEW

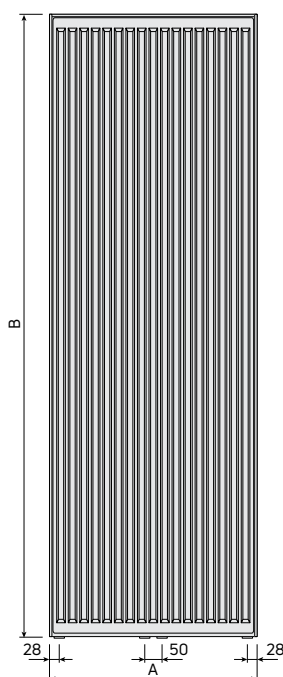

SIDE VIEWS

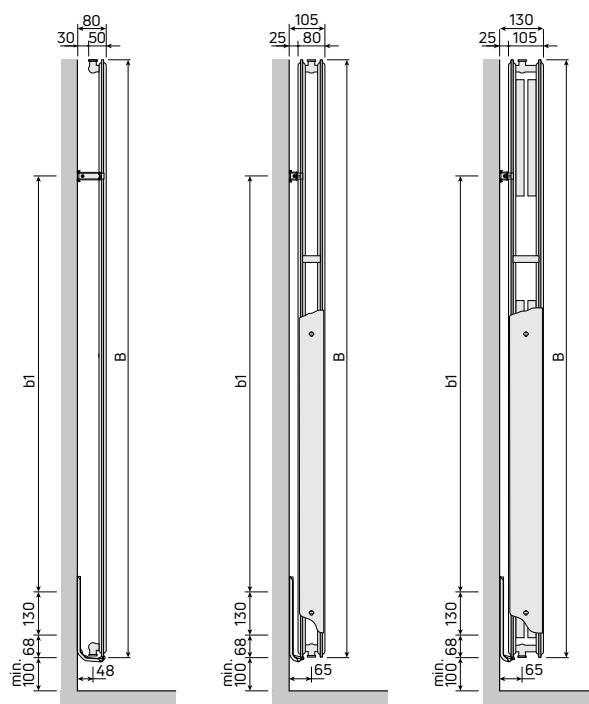


TYPE 10

TYPE 20 & 21


TYPE 22

TOP VIEWS

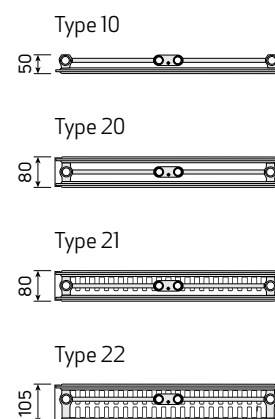

A = width
B = height
All dimensions in mm

REAR VIEWS WITH BRACKETS

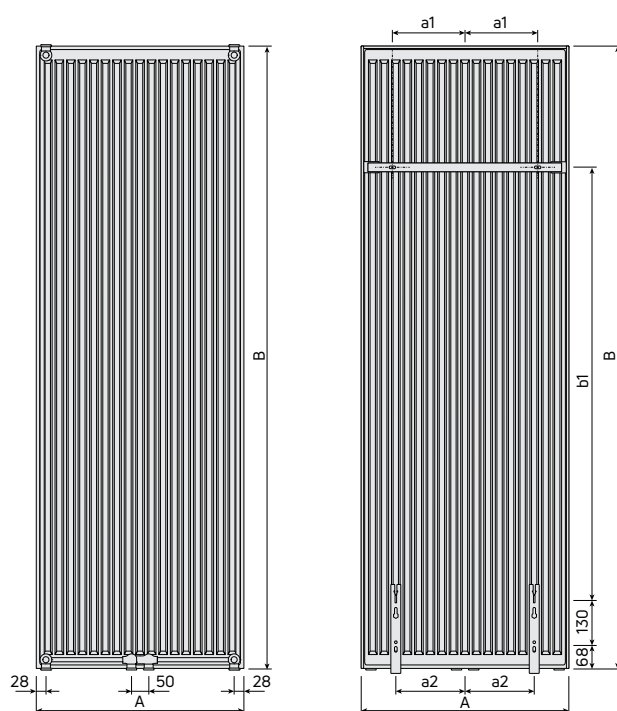


TYPE 10

TYPE 20, 21 & 22

MOUNTING DISTANCES

B (mm)	1800	1950	2100	2300
b1	1252	1402	1552	1752
A (mm)	300	450	600	750
a1	60	135	210	285
a2	75	125	200	250

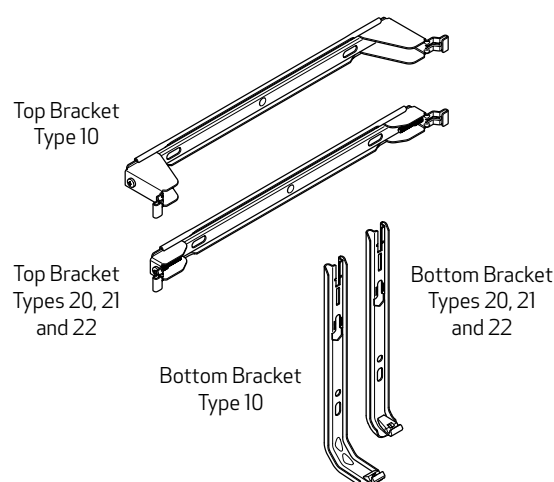

NOTE:

The radiators are supplied for a two-pipe system. The radiator is reversible top/bottom.
(Please note: for top connection, the radiator must be turned 180°)