

Aura Comfort WKH (Unfinished Floor)

Technical Specification



Aura Comfort - WKH is a free standing convector with longitudinal aluminium grille. Heat exchanger technology allows hot air to be released through the grille to its surrounding without undesirable release of its heat to the convectors body. WKH is for the rough floor.

Material of the Casing and Legs

Casing is made from 1.0mm galvanised steel, legs are made from 2.0mm galvanised steel. It is not allowed to sit or stand on the convector.

Material of the Heat Exchanger

Heat exchanger is made from copper pipes and aluminium lamellas. The diameter of the pipes is 15.9mm with 0.4mm of thickness. Endings are with 1/2" connections.

Water Connection

Right and left connection is possible, needs to be specified. In the standard delivery there is a hole for thermostatic head. If actuator will be used, side with the hole for the thermostatic head could be changed for the side without the hole, needs to be specified.


Technical Data

From 600 to 1600mm there are two legs, from 1800 to 2900mm there are three legs, max. operating pressure 10 bar, automatic air vent, tested in accordance with DIN EN 442.

Heat Outputs [W] 75/65/20°C

Height C (mm)		90			140			240			280		
Width B (mm)		96	146	236	96	146	186	236	96	146	186	236	280
Length A (mm)	600	109	245	549	197	379	554	722	268	515	753	982	290
	700	128	286	640	229	442	647	842	311	601	880	1145	337
	800	145	326	732	262	506	739	963	356	688	1005	1310	385
	900	164	368	824	295	569	832	1083	401	774	1132	1473	434
	1000	182	408	915	328	632	924	1203	446	860	1257	1636	482
	1100	200	449	1006	360	695	1016	1324	490	945	1382	1801	529
	1200	219	490	1098	393	758	1108	1444	534	1031	1508	1964	578
	1300	237	531	1190	431	834	1220	1591	586	1134	1660	2163	634
	1400	255	571	1281	469	909	1332	1737	638	1237	1812	2362	689
	1500	273	612	1373	507	985	1444	1884	689	1340	1964	2562	745
	1600	291	653	1464	544	1060	1556	2030	740	1443	2116	2761	800
	1800	327	734	1646	619	1211	1779	2322	842	1648	2420	3158	910
	2000	364	816	1830	695	1363	2003	2615	945	1854	2724	3556	1022
	2200	-	898	2013	770	1514	2227	2908	1047	2059	3029	3955	1132
	2400	-	979	2196	847	1666	2451	3200	1152	2266	3333	4352	1245
	2600	-	1061	2379	925	1818	2675	3493	1258	2473	3638	4750	1360
	2800	-	1176	2604	1008	1988	2912	3780	1372	2688	3953	5162	1477
	2900	-	1233	2764	1041	2047	3010	3931	1416	2784	4094	5346	1530


Dimensions (mm)

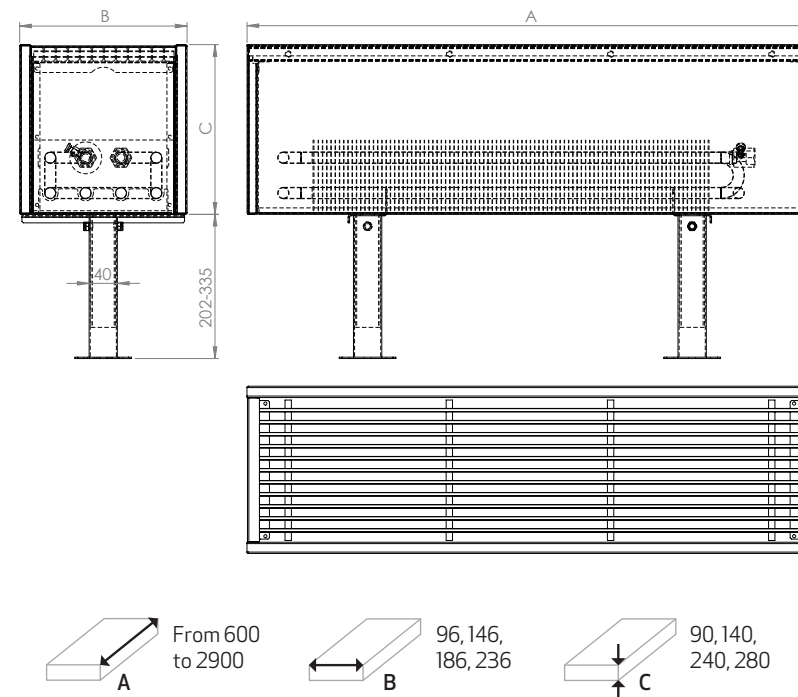

Standard Delivery Accessories

Standing legs for rough floor with screws and wall plugs.

Standard Colours



*Custom colours upon request